

ILP FLOODLIGHT INSTALLATION, USE, AND MAINTENANCE INSTRUCTIONS

Warning! Safety of this floodlight is guaranteed only if the following instructions are properly respected. It is therefore necessary to save them.

- **Warning! Before connecting to the main network, during positioning or maintenance, ensure the power has been disconnected.**


When the floodlight is on, ensure that a minimum distance of 3.28 ft between the lamp and the illuminated surface is respected, as indicated in Fig. 3-4.

- The floodlight can be used only with the protective glass. It's a float tempered glass. Sodic-calcic type.
- The floodlight is suitable for outdoor and indoor use.
- Installation height: Any.
- Fix the supporting bracket of the floodlight by means of (at least) 2 screws (1/4" - 5/16") positioned in the outer holes of the bracket (Fig. 1).
- The angle can be adjusted by loosening the affixed screws at the yoke bracket (Fig. 2).
- After adjusting the floodlight's aiming, tighten the 2 screws (M6 or M8) which are affixed to the yoke bracket, with 15 ft-lbs torsion.
- During installation and use, follow the instructions about functioning positions and minimum distances as indicated by Fig. 3-5.
- The floodlight is not suitable for serial installation of more floodlights.
- For wiring connections of the floodlight use a UL approved power cord for outdoor use with 18awg conductors.
- Secure power cord with strain-relief clamp and tighten cord lock securely.
- If the external power cord of this luminaire is damaged, it should be replaced immediately by the cord manufacturer, his service agent, or a similar qualified electrician in order to avoid a hazard.

FLOODLIGHT FOR LED

Characteristics:

- PRI: AC 120-277 VAC ~ 50/60Hz
- Power: 10W,20W,30W,40W,60W,80W,and 85W
- Lamp Type: LED
- Protection Rating: IP65

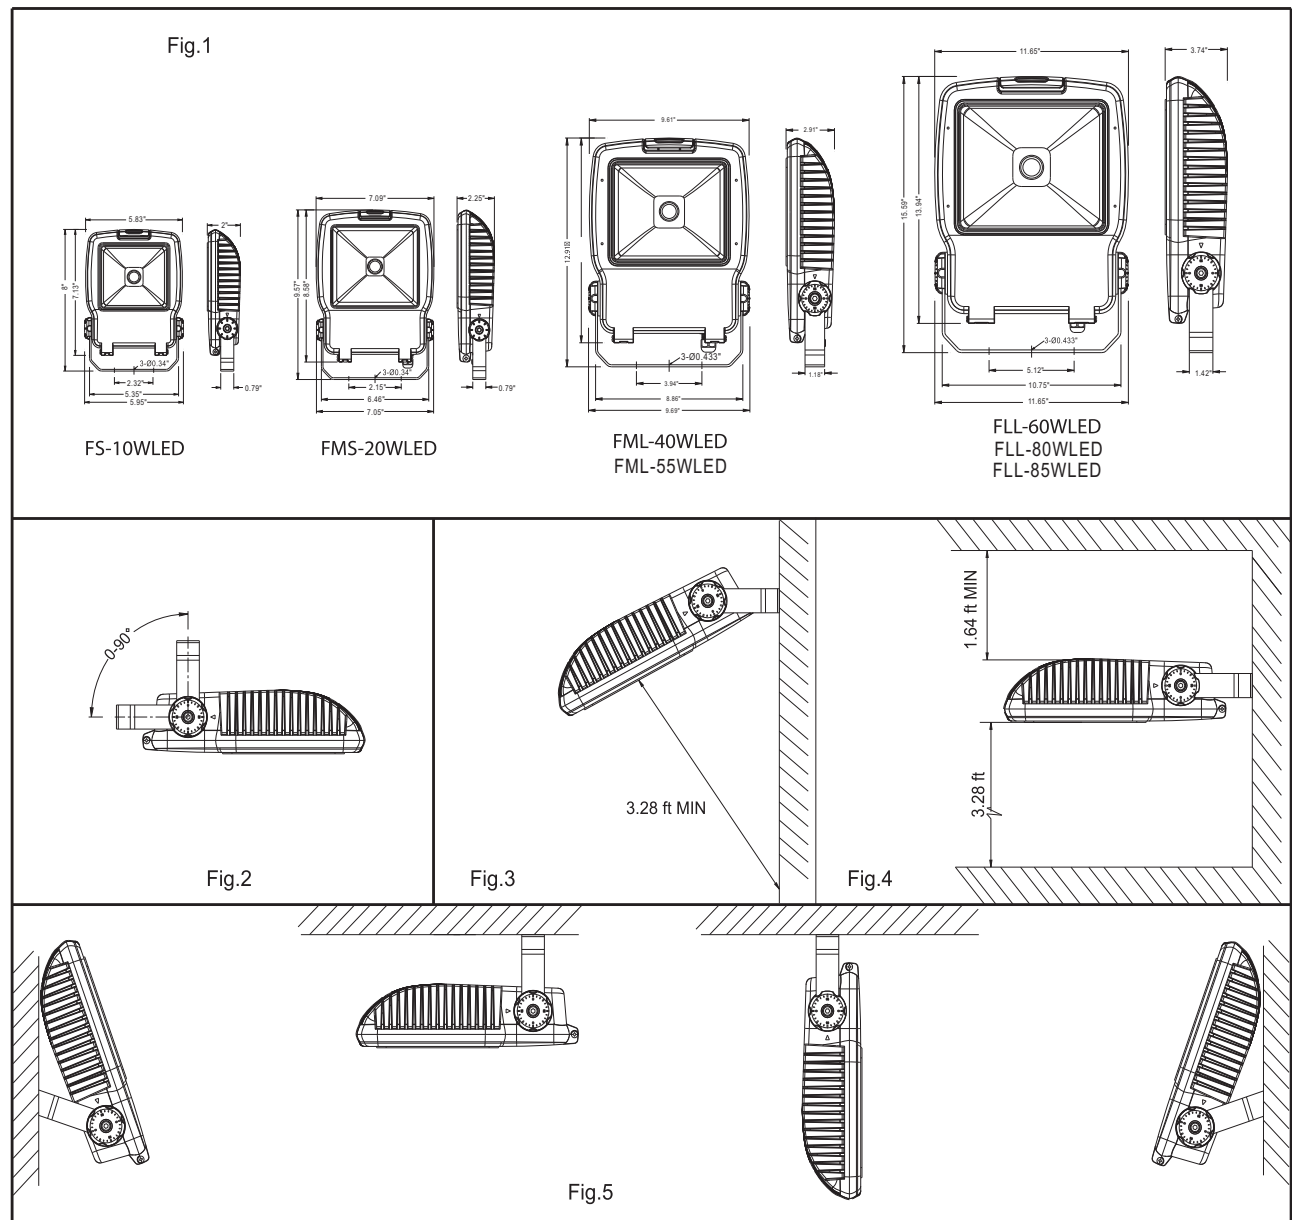

ILP FLOODLIGHT INSTALLATION, USE, AND MAINTENANCE INSTRUCTIONS

Warning! Safety of this floodlight is guaranteed only if the following instructions are properly respected. It is therefore necessary to save them.

- **Warning! Before connecting to the main network, during positioning or maintenance, ensure the power has been disconnected.**

When the floodlight is on, ensure that a minimum distance of 3.28 ft between the lamp and the illuminated surface is respected, as indicated in Fig. 3-4.

- The floodlight can be used only with the protective glass. It's a float tempered glass. Sodic-calcic type.
- The floodlight is suitable for outdoor and indoor use.
- Installation height: Any.
- Fix the supporting bracket of the floodlight by means of (at least) 2 screws (3/8") positioned in the outer holes of the bracket (Fig.1).
- The angle can be adjusted by loosening the affixed screws at the yoke bracket (Fig. 2).
- After adjusting the floodlight's aiming, tighten the 2 screws (M10) which are affixed to the yoke bracket, with 15 ft-lbs torsion.
- During installation and use, follow the instructions about functioning positions and minimum distances as indicated by Fig. 3-5.
- The floodlight is not suitable for serial installation of more floodlights.
- For wiring connections of the floodlight use a UL approved power cord for outdoor use with 18awg conductors.
- Secure power cord with strain-relief clamp and tighten cord lock securely.
- If the external power cord of this luminaire is damaged, it should be replaced immediately by the cord manufacturer, his service agent, or a similar qualified electrician in order to avoid a hazard.

FLOODLIGHT FOR LED

Characteristics:

- PRI: AC 120-277 VAC ~ 50/60Hz
- Power: 80W,100W,120W,140W,and 160W
- Lamp Type: LED
- Protection Rating: IP65

Fig.1


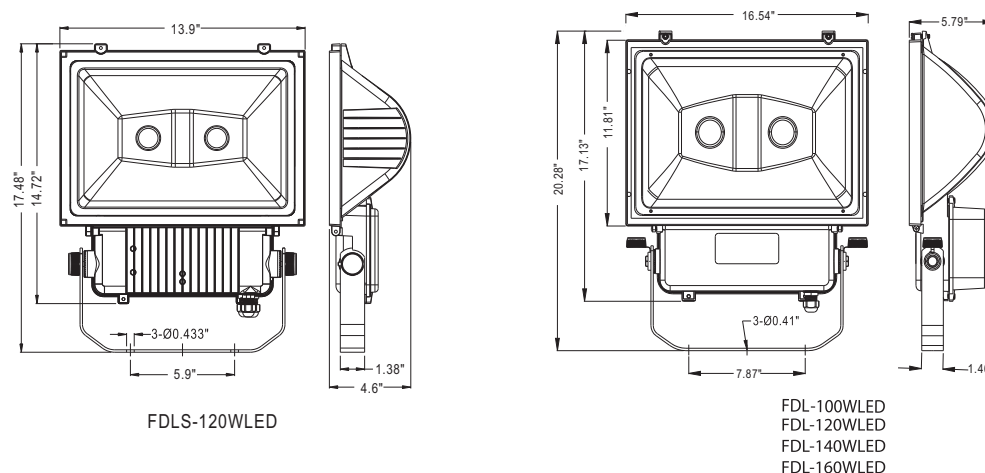


Fig.2




Fig.3

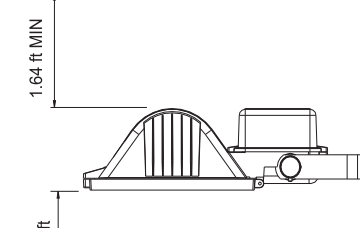


Fig.4

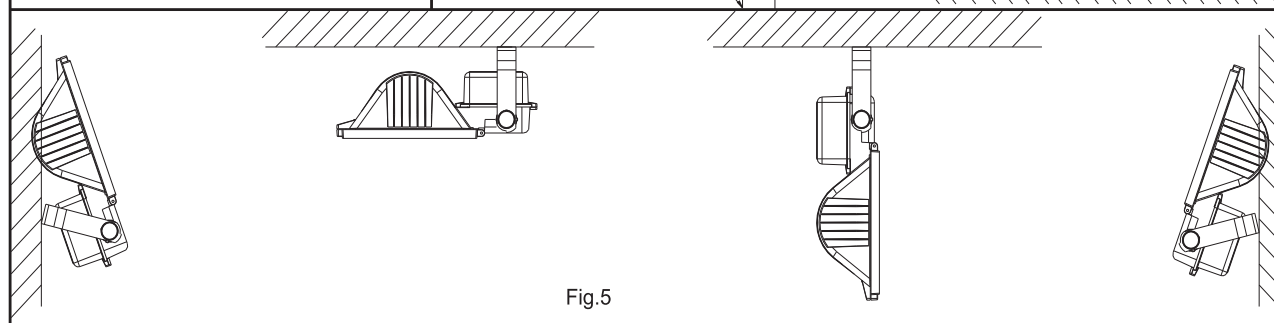


Fig.5