


# RTR

TROFFER RETROFIT KIT

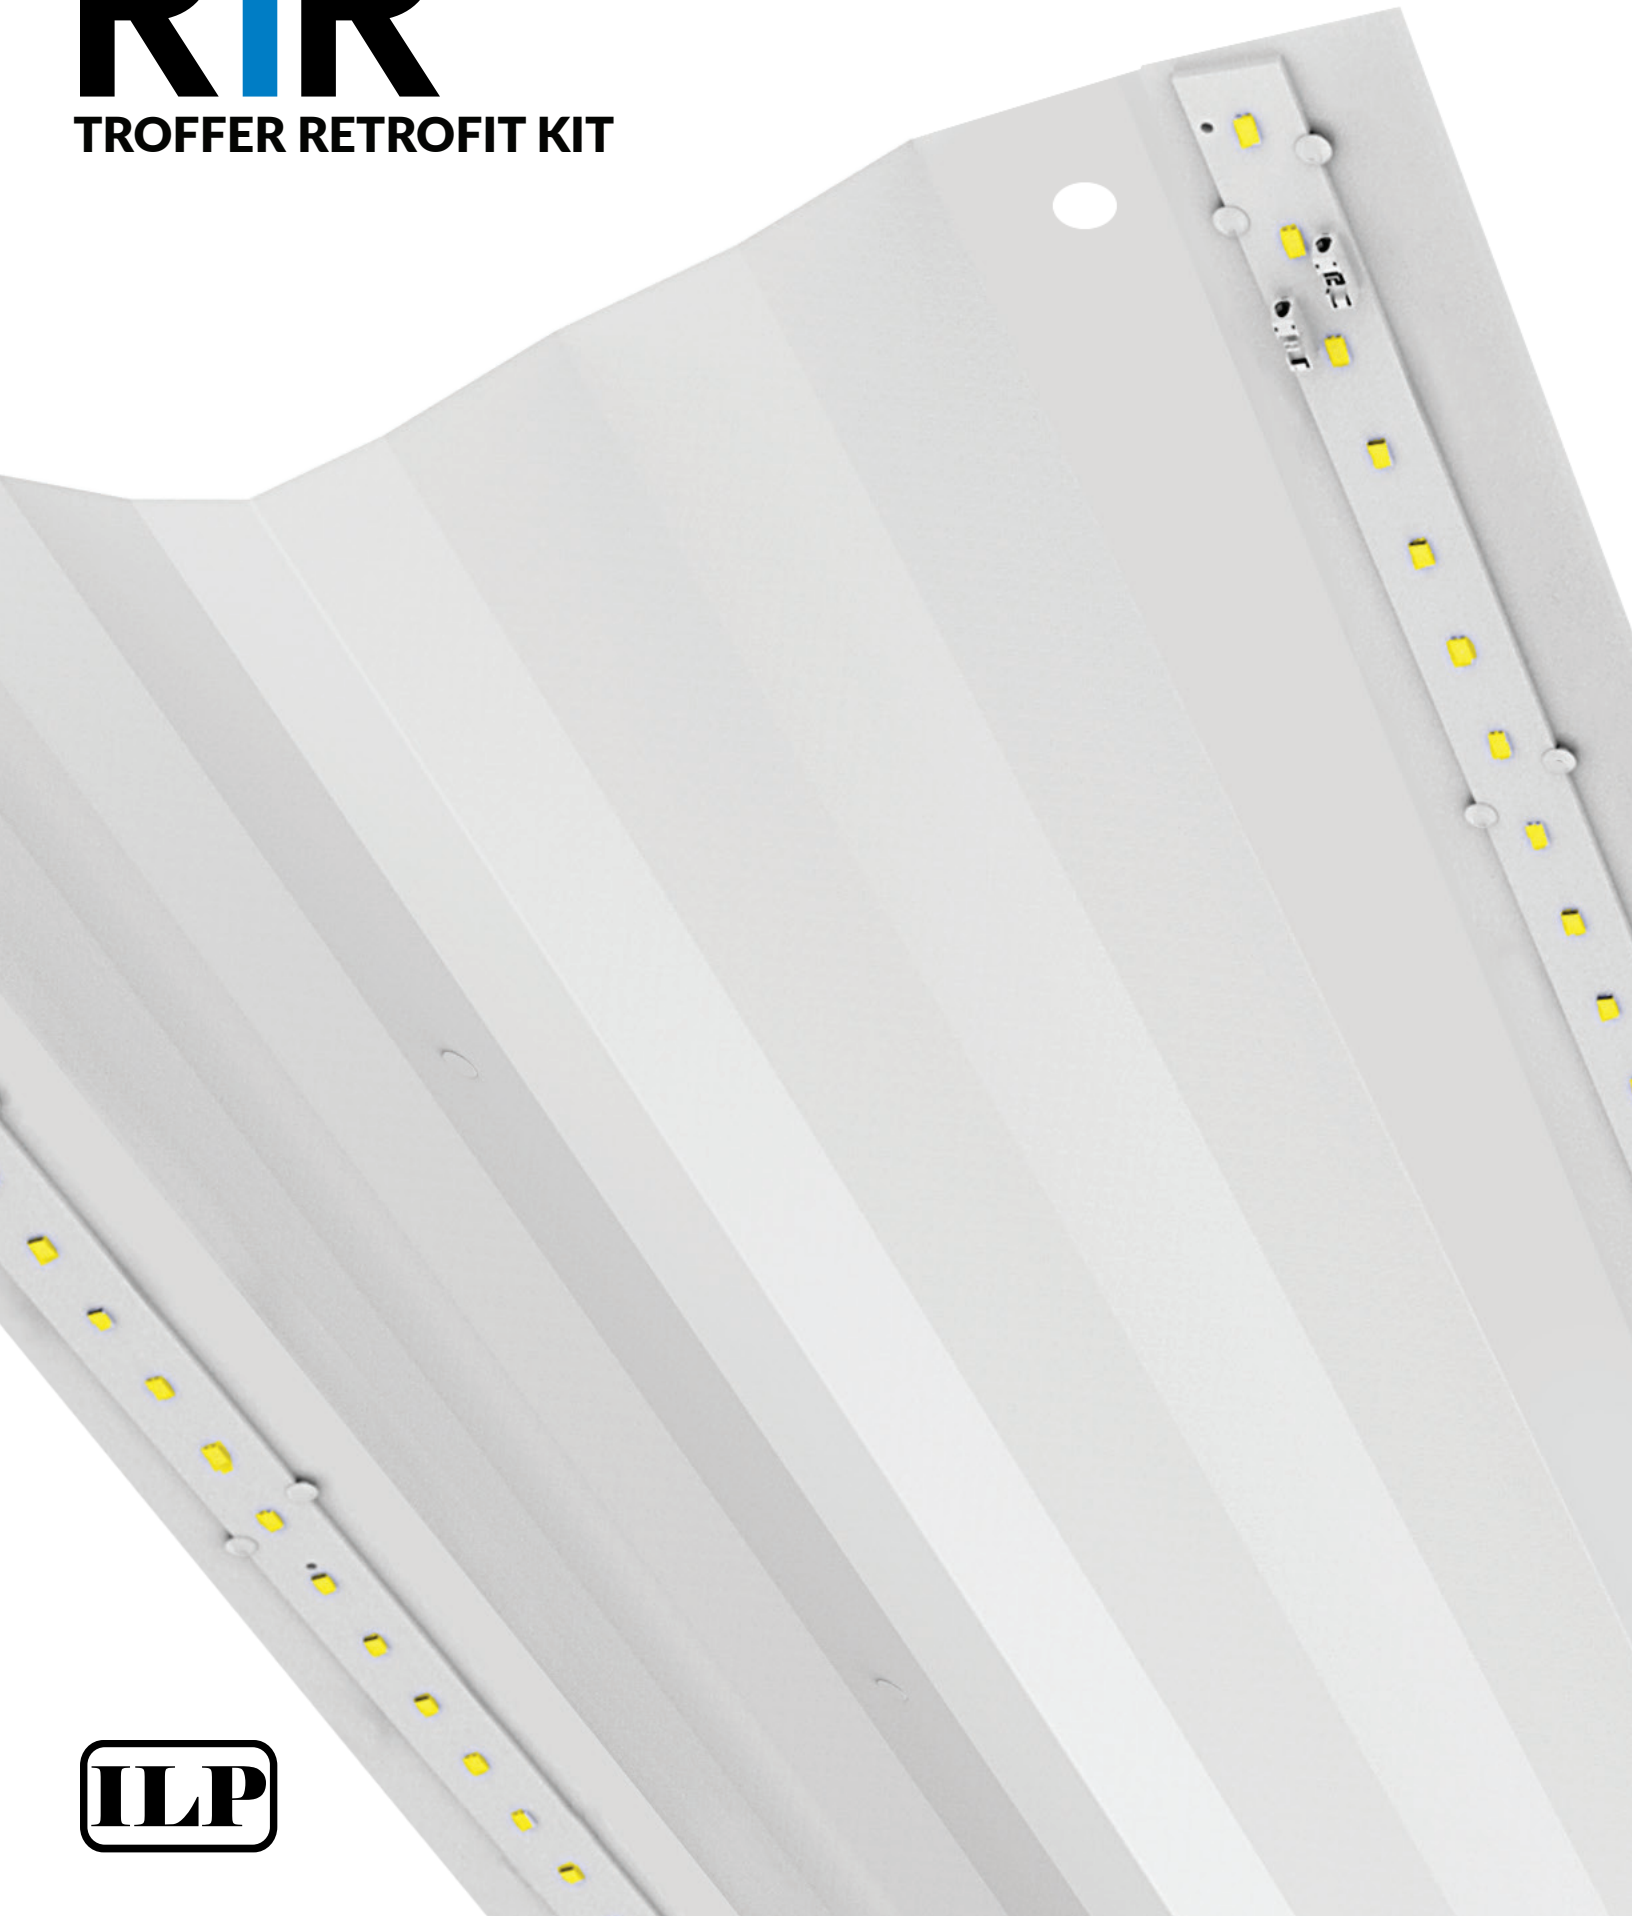

**ILP**

# RTR

## TROFFER RETROFIT KIT



### SPECIFICATIONS

- One-piece construction, 2 minute install
- Designed for Prismatic & Parabolic Troffers
- Fits between existing socket bars
- 2' x 2' & 2' x 4' Available
- 2,000 – 4,800 Lumen Packages
- High Efficacy – Up to 167 lm/W
- 3500K & 4000K CCT
- 0-10V 120-277V Dimmable Driver
- Frosted lens option to remove shadowing & pixilation
- 5 Year Warranty
- ETL Damp Location Listed
- DesignLights Consortium® Premium Qualified Luminaire

### OPTIONS

- Lutron Vive (RF Only)
- Microwave Bi-Level Dimming
- Bi-level Dimming Driver
- Frosted Acrylic Lens
- Battery Backup
- 347V




Standard




Shown with Frosted Acrylic Lens


### INSTALLATION INSTRUCTIONS

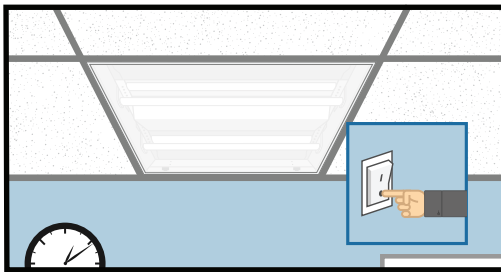


**Step 1:** Shut off or disconnect power to the fixture.

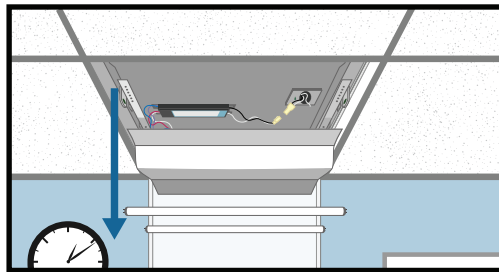


**Step 2:** Open existing fixture doorframe and remove existing fluorescent lamps and reflector, then disconnect existing connections to the fluorescent ballast. Existing socket bars do not need to be removed.

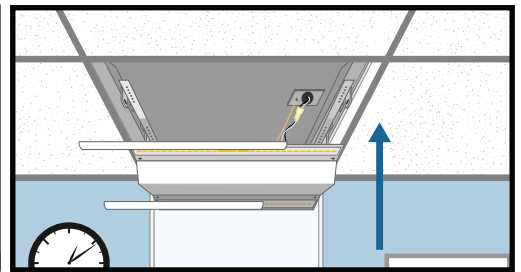


**Step 3:** Connect the RTR Kit to AC Power and ground. Optional toolless frosted lenses can be added to remove shadowing or pixilation.

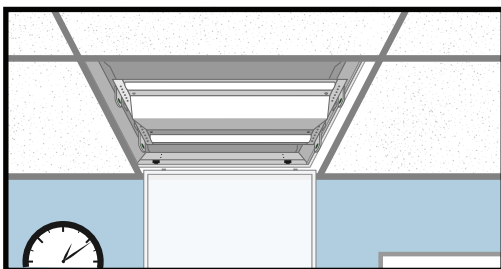

**Step 4:** Install the RTR to the back of the existing fixture housing with supplied screws. RTR will fit in between existing socket bars.

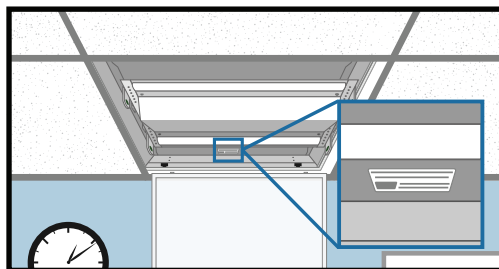

**Step 5:** Adhere the Fixture ID Label to the original fixture housing in a clear & visible location.

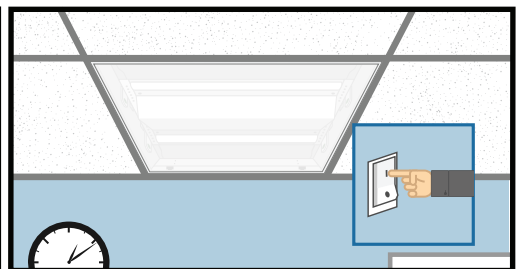

**Step 6:** Close existing fixture doorframe and turn on or reconnect power to the fixture to complete the installation.