

CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS



# I-BAY

## OPEN FRAME HIGH BAY

### SPECIFICATIONS

- Precision Formed All Aluminum Frame
- Tool-Less Hinged Bottom Ballast Access Door
- Plug-n-Play Sensor
- Multiple Reflector Options
  - 95% Enhanced Aluminum
    - Narrow Distribution
    - Medium Distribution
  - 91% White Aluminum
- End Cap Power Access
- Multiple Lamp and Ballast Options
- T5HO or Super T8 High Efficiency



### APPLICATIONS

- Aisle Ways
- Warehouse
- Retail
- Distribution
- Manufacturing Plant



### ORDERING GUIDE:

**IB - 4T5 - E - UH - LI50**

SERIES	LAMP	REFLECTOR	BALLAST	OPTIONS
<input type="checkbox"/> IB - I-Bay Aluminum	<input type="checkbox"/> 4T5 - 4 F54 <input type="checkbox"/> 6T5 - 6 F54 <input type="checkbox"/> 8T5 - 8 F54  <input type="checkbox"/> 4T8 - 4 F32 <input type="checkbox"/> 6T8 - 6 F32 <input type="checkbox"/> 8T8 - 8 F32	<input type="checkbox"/> E - 95% Enhanced <input type="checkbox"/> EN - 95% Enhanced Narrow <input type="checkbox"/> ES - 95% Enhanced Shallow <input type="checkbox"/> W - 91% White <input type="checkbox"/> WS - 91% White Shallow	<input type="checkbox"/> UH - 120-277 T5HO <input type="checkbox"/> UH - 120-277 T8 HBF <input type="checkbox"/> PSH - Program Start T8 HBF <input type="checkbox"/> UR - 120-277 T8 NBF <input type="checkbox"/> PSN - Program Start T8 HBN <input type="checkbox"/> 4H - 347-480V	<input type="checkbox"/> CORDX - Cord X = Spec length <input type="checkbox"/> PNP-OS - Plug n Play Sensor (Field Installed) <input type="checkbox"/> EB - Extra Ballast <input type="checkbox"/> FIOS - Factory Installed Occupancy Sensor <input type="checkbox"/> QDCX - Quick Disconnect Cord, X = Length <input type="checkbox"/> HB-XX-18Y-PAD - Y-Toggle Cable System, XX = Length <input type="checkbox"/> HB-XX-LOOP - Loop Cable System, XX = Length <input type="checkbox"/> LIXX - Lamps Installed, XX = Lamp Color (ex. LI50 = 5000K) <input type="checkbox"/> SD480 - 480V Step Down Transformer <input type="checkbox"/> UP - Up Light <input type="checkbox"/> WC - 11 ga. Wire Cage <input type="checkbox"/> XXXXBBY - Battery Backup, XXXX = Total Lumens Y = Lamps

(Battery packs & step down transformers are not available on some higher wattage units, please consult the factory for more information)




Industrial Lighting Products

CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

# I-BAY

## OPEN FRAME HIGH BAY

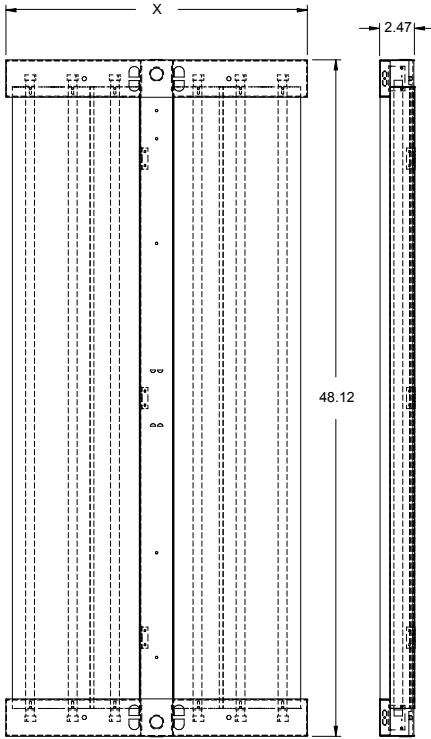

E- Reflector X-Dimensions	
# of Lamps	Inches
4	15.5"
6	21.5"
8	27.5"

EN- Reflector X-Dimensions	
# of Lamps	Inches
4	19.5"
6	27.5"
8	35.5"

ES- Reflector X-Dimensions	
# of Lamps	Inches
4	10.75"
6	14.75"
8	18.75"

### MOUNTING OPTIONS

- V-Clips for dual point chain or cable hanging
- Dual point pendant mount (KOs)
- Center pendant
  - 6 and 8 lamp fixture have 3/4 in center hole for pendant or hook
  - 4 lamp fixture do not have center hole access
    - Select extra ballast option to have balanced fixture around center hole
    - Mounting Kit
- Available Accessories
  - Cable - Includes 2 adjustable cable hangers

See "Accessories Cut Sheet" for complete listing of mounting options and accessories