

2ft CHB Frosted Lens Kit Installation Instructions

Note: If you did not run power into the fixture through the access plate, take a moment to relocate the disconnect near the access plate. Once the lens is installed, the driver cover will only be accessible by removing the lens frame.

Before beginning the installation process, please verify that each kit contains the following components:

1x Lens frame, preassembled with lens installed 4x #8-32X1/4" Slotted Hex Head Screw

To install the lens frame, slide the frame onto the fixture from below, as shown in Figure 1. Line up the holes on the lens frame with the holes on the long sides of the body, and secure the frame to the fixture using the screws provided.

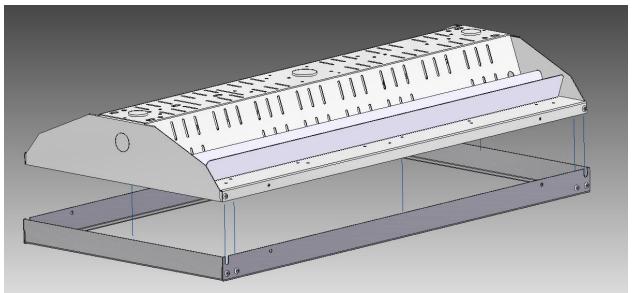


Figure 1: Slide assembled frame onto fixture