




# FDL-GLS INSTALLATION INSTRUCTIONS

Remove the 4 lens cover screws

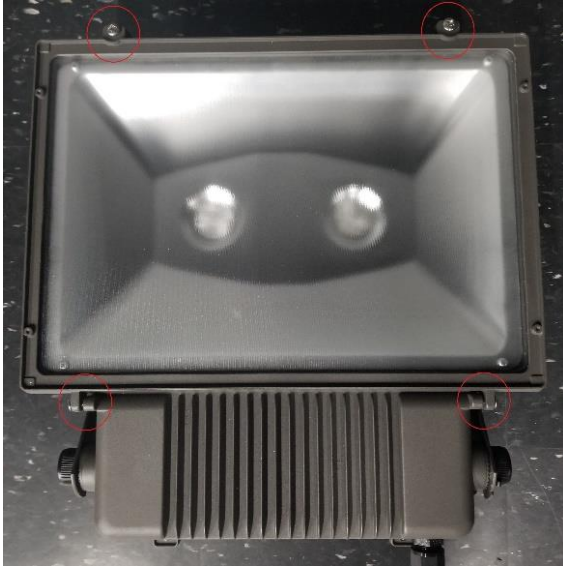

Locate the Glare Shield over the fixture lens and locate the existing screw holes.



Reusing the existing hardware, insert and tighten the side screws.



Reusing the existing hardware, insert and tighten the top screws.

