


EDV to EDV2.0 CONVERSION

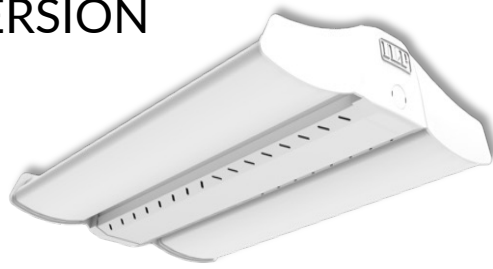

	<i>EDV</i>	<i>EDV 2.0</i>
LUMENS		
2' Housing Lumen Range	8,000 to 24,000 Lumens	8,000 to 36,000 Lumens
4' Housing Lumen Range	30,000 to 60,000 Lumens	12,000 to 100,000 Lumens
Lumen Packages	9	17
2' Up Light	2,000 Lumens	2,000 - 4,000 Lumens
4' Up Light	4,000 Lumens	2,000 - 4,000 Lumens
ELECTRICAL/MECHANICAL		
Ambient Temp Range	-40°C to +55°C	-40°C to +55°C Optional HT -40°C to +65°C

Cross Reference Guide	
EDV 1.0	EDV 2.0
EDV-8L-U-40-FRL	EDV2-8L-U-40-FRL
EDV-12L-U-40-FRL	EDV2-12L-U-40-FRL
EDV-15L-U-40-FRL	EDV2-15L-U-40-FRL
EDV-18L-U-40-FRL	EDV2-18L-U-40-FRL
EDV-24L-U-40-FRL	EDV2-24L-U-40-FRL
N/A	EDV2-30L-U-40-FRL
N/A	EDV2-36L-U-40-FRL
N/A	EDV4-12L-U-40-FRL
N/A	EDV4-15L-U-40-FRL
N/A	EDV4-18L-U-40-FRL
N/A	EDV4-24L-U-40-FRL
EDV-30L-U-40-FRL	EDV4-30L-U-40-FRL
EDV-36L-U-40-FRL	EDV4-36L-U-40-FRL
EDV-48L-U-40-FRL	EDV4-48L-U-40-FRL
EDV-60L-U-40-FRL	EDV4-60L-U-40-FRL
N/A	EDV4-75L-U-40-FRL
N/A	EDV4-100L-U-40-FRL