


Project Name:	Part Number:	Type:
---------------	--------------	-------

BL

VAPOR TIGHT HIGH BAY

FEATURES

- Robust & Durable Wide Body Vapor Tight High Bay
- Industry Leading Max Ambient up to 140°F
 - Ambient Range -40°F to 140°F (Select Models)
- Extremely High Efficacy up to 168 lm/W
- 2ft & 4ft Fixture Lengths
- Lumen Packages Ranging 12,000-40,000
- Wide & Best in Class Narrow Distribution Optics
- Surface, Pendant, or Suspended Mounting Options
- IK10 Impact Rated Lens
- Fiberglass Body Attributes
 - F1 Weatherability Rating, 1500 PSI High Pressure Hosedown & 5VA Flame Rating
 - IP65, IP66, IP67 & IP69 (2ft Only), NEMA4X, NSF
- 3000K-5000K CCT
- >80 Color Rendering Index (CRI)
- Calculated L70 >100,000 Hours
- 0-10V Dimmable Driver (100%-10%)
- 5 Year Warranty; Optional 10 Year Available
- ETL Listed for Wet Locations
- DesignLights Consortium® Premium Qualified Luminaire
- Build America Buy America (BABA) Compliant

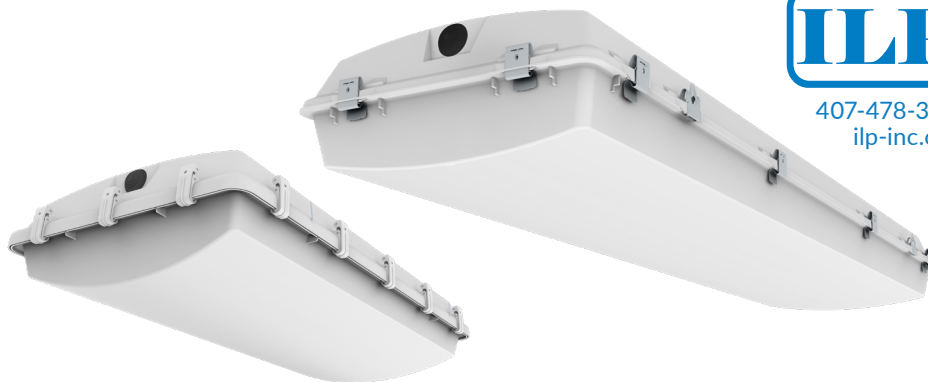

407-478-3759
ilp-inc.com



SUITABLE APPLICATIONS

- Coolers / Freezers • Food & Beverage Preparation • Industrial • Hockey Rinks • Saw Mills • Education • Healthcare • Natatorium ²³

ORDERING GUIDE:

SERIES	LUMENS	DRIVER	CCT	LENS OPTIONS	DISTRIBUTION	TEMPERATURE ¹⁰	WARRANTY	COMPLIANCE
BL2 2ft Blizzard	12L	U120-277V	50 40 35 30	CAL Clear Acrylic FRAL Frosted Acrylic PCL Clear Polycarbonate PFL ¹ Frosted Polycarbonate	BLANK Wide Distribution ND Narrow Distribution	BLANK Standard Ambient Temp HT High Ambient Temp	BLANK 5 Year 10 YR ² 10 Year	BABA Build America Buy America Compliant
BL4 4ft Blizzard	12L 18L 24L							

OPTIONS	
Factory Installed	
SS	Stainless Steel Latches - standard on BL4
Cx/yW	Cord (x=Length; 6,10,15) (y=# of conductors; 3,4,5,6)
Mounting Options	
BL-RMBSS ^{3,4}	BL2/BL4 Rigid Mounting Beam for Surface or Dual Pendant Mounting
BL2-RCMBKSS ^{3,5}	BL2 Center Bracket for Single Point Mounting
BL4-RCMBKSS ^{3,5}	BL4 Center Bracket for Single Point Mounting
SMB KIT BL	Surface Mount V-Clip Brackets
HUB 1/2 ⁶	Conduit Hub 1/2"
HUB 3/4 ⁷	Conduit Hub 3/4"
Ship with Accessories	
ACxY ⁸	Y-Toggle Aircraft Cable System (x=ft)
ACxY/SS ⁸	Stainless Steel Y-Toggle Aircraft Cable System (x=ft)

¹ Does not qualify for DLC

² Contact factory for more details

³ Does not qualify for NSF standards

⁴ Must be used with (2) HUB 1/2" if dual pendant mounting

⁵ Use with BL-RMBSS & HUB 3/4" if single pendant mounting

⁶ Must be used with RMBSS for dual pendant mounting

⁷ Must be used with BL-RMBSS & BL-RMBKSS if single pendant mounting

⁸ Not BABA compliant

BL

VAPOR TIGHT HIGH BAY



QUICK SHIP ITEMS:

SERIES		LUMENS	DRIVER	CCT	LENS	
BL2	2ft Blizzard	12L	U 120-277V	50	FRAL	Frosted Acrylic
BL4	4ft Blizzard	12L 18L 24L	U 120-277V	50	FRAL	Frosted Acrylic

SYSTEMS INFO ¹	3000K		3500K		4000K		5000K				
Part Numbers	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy	Watts ²	CRI	Replaces
BL2-12L-U-XX-CAL	12,062 lm	150 lm/W	12,465 lm	155 lm/W	12,887 lm	160 lm/W	13,150 lm	164 lm/W	80W	>80	250W MH, 4T8
BL2-12L-U-XX-CAL-ND	11,493 lm	142 lm/W	11,877 lm	147 lm/W	12,279 lm	152 lm/W	12,530 lm	155 lm/W	81W		
BL2-12L-U-XX-FRAL	11,869 lm	148 lm/W	12,124 lm	151 lm/W	12,534 lm	156 lm/W	12,790 lm	159 lm/W	80W		
BL2-12L-U-XX-FRAL-ND	11,271 lm	139 lm/W	11,422 lm	142 lm/W	11,809 lm	146 lm/W	12,050 lm	149 lm/W	81W		
BL2-12L-U-XX-PCL	11,980 lm	149 lm/W	12,238 lm	152 lm/W	12,652 lm	157 lm/W	12,910 lm	161 lm/W	80W		
BL2-12L-U-XX-PCL-ND	11,387 lm	141 lm/W	11,540 lm	143 lm/W	11,930 lm	148 lm/W	12,120 lm	150 lm/W	81W		
BL4-12L-U-XX-CAL	12,145 lm	154 lm/W	12,550 lm	159 lm/W	12,975 lm	165 lm/W	13,240 lm	168 lm/W	79W	>80	250W MH, 4T8
BL4-12L-U-XX-CAL-ND	11,997 lm	152 lm/W	12,398 lm	157 lm/W	12,818 lm	163 lm/W	13,079 lm	166 lm/W	79W		
BL4-12L-U-XX-FRAL	11,787 lm	149 lm/W	12,181 lm	155 lm/W	12,593 lm	160 lm/W	12,850 lm	163 lm/W	79W		
BL4-12L-U-XX-FRAL-ND	11,156 lm	141 lm/W	11,529 lm	146 lm/W	11,919 lm	151 lm/W	12,162 lm	154 lm/W	79W		
BL4-12L-U-XX-PCL	11,989 lm	152 lm/W	12,389 lm	157 lm/W	12,809 lm	163 lm/W	13,070 lm	166 lm/W	79W		
BL4-12L-U-XX-PCL-ND	11,802 lm	150 lm/W	12,196 lm	155 lm/W	12,609 lm	160 lm/W	12,866 lm	163 lm/W	79W		
BL4-18L-U-XX-CAL	19,308 lm	148 lm/W	19,954 lm	153 lm/W	20,629 lm	158 lm/W	21,050 lm	161 lm/W	131W	>80	400W MH, 4T5HO, 6T8
BL4-18L-U-XX-CAL-ND	18,841 lm	146 lm/W	19,470 lm	151 lm/W	20,129 lm	156 lm/W	20,540 lm	159 lm/W	129W		
BL4-18L-U-XX-FRAL	18,740 lm	143 lm/W	19,366 lm	148 lm/W	20,021 lm	153 lm/W	20,430 lm	156 lm/W	131W		
BL4-18L-U-XX-FRAL-ND	17,520 lm	136 lm/W	18,105 lm	140 lm/W	18,718 lm	145 lm/W	19,100 lm	148 lm/W	129W		
BL4-18L-U-XX-PCL	19,061 lm	146 lm/W	19,698 lm	151 lm/W	20,364 lm	156 lm/W	20,780 lm	159 lm/W	131W		
BL4-18L-U-XX-PCL-ND	18,520 lm	143 lm/W	19,138 lm	148 lm/W	19,786 lm	153 lm/W	20,190 lm	157 lm/W	129W		
BL4-24L-U-XX-CAL	23,977 lm	151 lm/W	24,779 lm	156 lm/W	25,617 lm	162 lm/W	26,140 lm	165 lm/W	159W	>80	400W MH, 6T5HO
BL4-24L-U-XX-CAL-ND	23,686 lm	149 lm/W	24,478 lm	154 lm/W	25,306 lm	160 lm/W	25,823 lm	163 lm/W	159W		
BL4-24L-U-XX-FRAL	23,271 lm	147 lm/W	24,049 lm	152 lm/W	24,863 lm	157 lm/W	25,370 lm	160 lm/W	159W		
BL4-24L-U-XX-FRAL-ND	22,026 lm	139 lm/W	22,762 lm	144 lm/W	23,532 lm	148 lm/W	24,012 lm	151 lm/W	159W		
BL4-24L-U-XX-PCL	23,670 lm	149 lm/W	24,461 lm	154 lm/W	25,289 lm	159 lm/W	25,805 lm	163 lm/W	159W		
BL4-24L-U-XX-PCL-ND	23,301 lm	147 lm/W	24,079 lm	152 lm/W	24,894 lm	157 lm/W	25,402 lm	160 lm/W	159W		

¹Values are nominal, see IES file for more detail

²Electrical data at 25C (77F). Actual wattage may differ by +/-10%.

BL

VAPOR TIGHT HIGH BAY

AMBIENT TEMPERATURE RANGE

Part Numbers	Suspended (18 in.)		Surface Mount	
	Standard	High-Temp	Standard	High-Temp
BL2-12L-U-XX-CAL	122°F (50°C)	131°F (55°C)	113°F (45°C)	122°F (50°C)
BL2-18L-U-XX-CAL	113°F (45°C)	122°F (50°C)	104°F (40°C)	113°F (45°C)
BL2-24L-U-XX-CAL	104°F (40°C)	113°F (45°C)	90°F (32°C)	99°F (37°C)
BL4-12L-U-XX-CAL	131°F (55°C)	140°F (60°C)	122°F (50°C)	131°F (55°C)
BL4-18L-U-XX-CAL	131°F (55°C)	140°F (60°C)	122°F (50°C)	131°F (55°C)
BL4-24L-U-XX-CAL	125°F (52°C)	131°F (55°C)	114°F (46°C)	120°F (49°C)
BL4-30L-U-XX-CAL	122°F (50°C)	131°F (55°C)	111°F (44°C)	120°F (49°C)
BL4-36L-U-XX-CAL	122°F (50°C)	131°F (55°C)	111°F (44°C)	120°F (49°C)
BL4-40L-U-XX-CAL	113°F (45°C)	122°F (50°C)	102°F (39°C)	111°F (44°C)

Polycarbonate lenses reduce ambient temperatures 9°F (5°C)
High Temp models not available with battery backup options

SPECIFICATIONS

CONSTRUCTION

Injection molded one piece 5VA rated fiberglass body with chemical resistant finish for rigidity, durability and prolonged life in rough environments. F1 weatherability and 1500 PSI hosedown rated housing. Toolless hinged removable gear tray for quick and easy access to electrical. Captive latches fastened to housing to safely secure lens to housing. Designed to achieve maximum performance and improved aesthetics.

ELECTRICAL

Class 2 LED light engine for high efficacy and long life. Calculated L70 > 100,000hrs. LED Lumen Maintenance Estimates based on TM-21 projections for the light source at 25°C ambient.

INSTALLATION

Designed for a variety of mounting applications including surface, single and dual pendant, and suspended. Pre-drilled holes on each side of fixture for electrical access and wiring. Holes plugged from factory with rubber IP rated seal. 1/2" HUBs available for threaded power entry from both ends. Toolless hinged removable gear tray for quick and easy access to electrical.

WARRANTY

5 Year Warranty; 10 Year Warranty Optional (Terms and Conditions apply)

OPTICS

Robust injection molded and impact resistant PMMA lens options for durability and LED glare reduction. Standard Clear Acrylic and optional Frosted Acrylic, Clear & Frosted Polycarbonate lens options available. All lens options are IK10 rated; highest impact rating available. Field removeable lens for easy access to LED boards, drivers & maintenance.

THERMAL

Ambient temperature range -40°F up to 140°F (-40°C to 60°C) on select models with high ambient temperature options. Fixture to be mounted at a minimum plenum height of 18" for suspended mounting. Reduced maximum ambient for surface mounting. Reference High Ambient Temperature Ratings by lumen package on page (3) for more detail.


CERTIFICATIONS

ETL Listed to US and Canadian safety standards. Suitable for Wet Locations. American Recovery and Reinvestment Act Funding Compliant. BAA & BABA Compliant. IP65, IP66, IP67, & IP69 (Only 2' Housing) Rated. NSF Listed. NEMA 4X Rated. 1500 PSI Hose Down Rated. DLC Premium Listed Product, Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

BL


VAPOR TIGHT HIGH BAY

MOUNTING OPTIONS

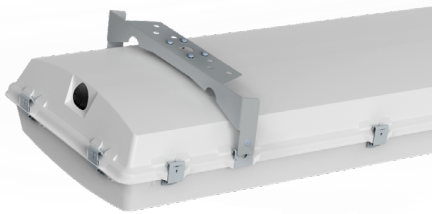

BL-RMBSS

Stainless Steel Rigid Mounting Beam for secure surface mounting or dual pendant mounting. (Two 1/2" Conduit Hubs required for dual pendant mounting, sold separately)

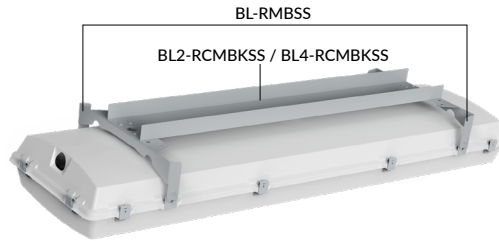

BL2-RCMBKSS / BL4-RCMBKSS

Stainless Steel Rigid Mounting Bracket for Single Point Mounting. Must be used in combination of BL-RMBSS and HUB 3/4 (One 3/4" Conduit Hub required for single point mounting, sold separately)



SMB KIT BL

Surface Mount V-Clip Brackets provides a 2" space above the fixture



AC5Y - AC10Y

Includes 2 adjustable cable hangers. Available in 5' and 10'; Consult factory for longer lengths. Stainless Steel models available.




HUB 1/2 & HUB 3/4

HUB 1/2 - 1/2" Conduit Hub. HUB 3/4 - 3/4" Conduit Hub.


BL
VAPOR TIGHT HIGH BAY

LINE DRAWING

BL 2ft

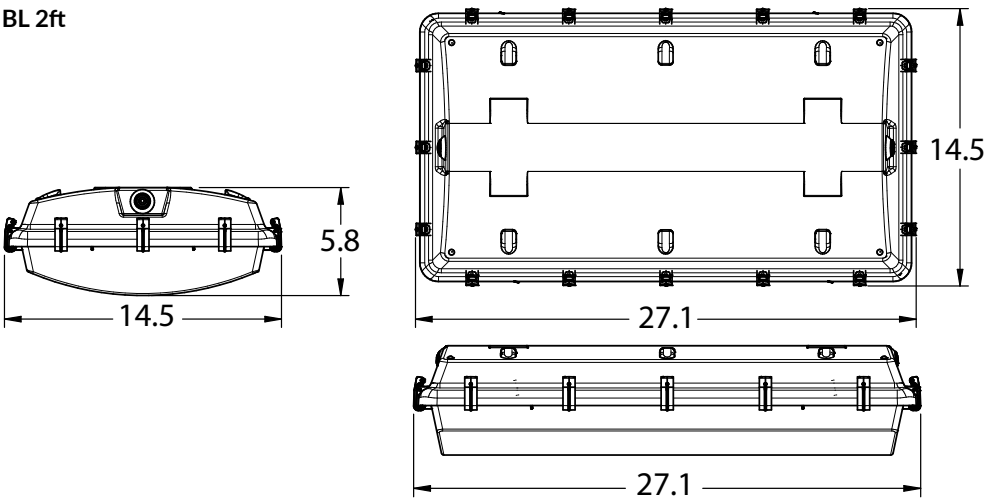

BL 4ft

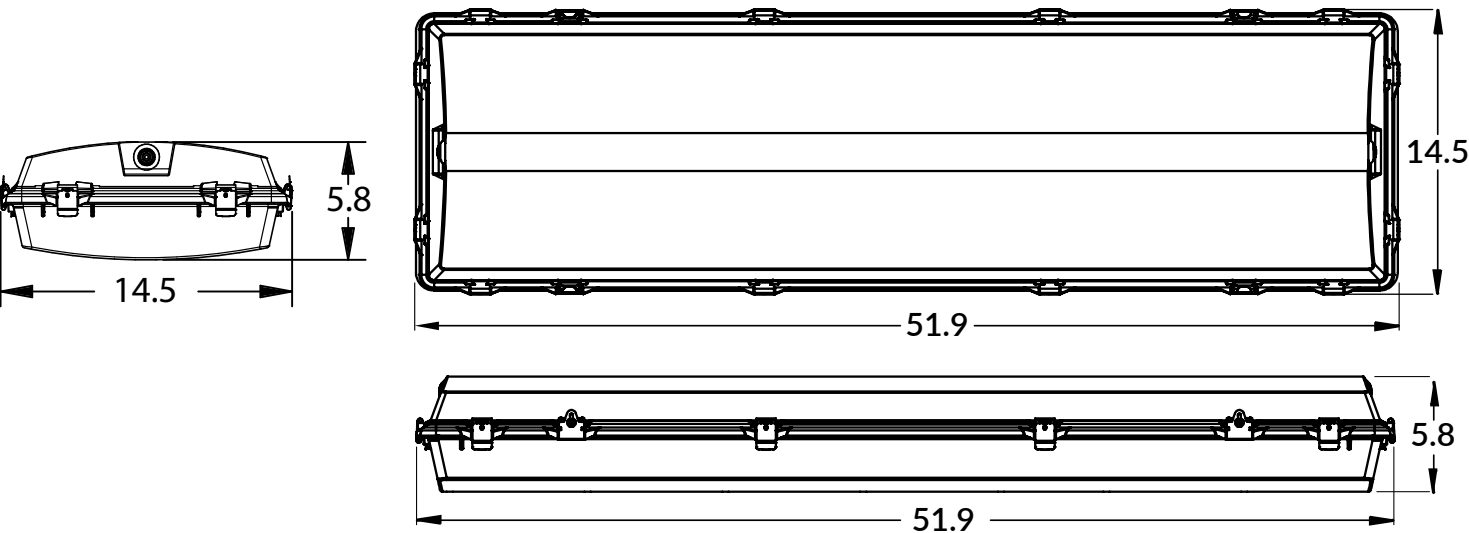


BL

VAPOR TIGHT HIGH BAY

PHOTOMETRIC DATA


LUMINAIRE DATA	
Part Number	BL2-12L-U-50-CAL
Description	2ft Blizzard, 13,000 Lumens, Clear Acrylic Lens
Fixture Lumens (lm)	13,144 lm
Wattage (W)	80 W
Efficacy (lm/W)	164 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.30, 90° = 1.29

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	5,787	44%
0° - 60°	10,345	79%
0° - 90°	13,060	99%
90° - 180°	84	0%
0° - 180°	13,144	100%

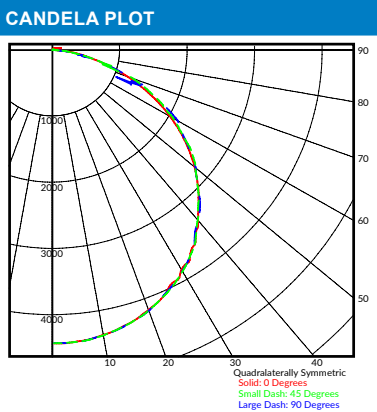


LUMINAIRE DATA	
Part Number	BL2-12L-U-50-CAL-ND
Description	2ft Blizzard, 13,000 Lumens, Clear Acrylic Lens, Narrow Distribution
Fixture Lumens (lm)	12,223 lm
Wattage (W)	80 W
Efficacy (lm/W)	152 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.29, 90° = 0.77

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	8,549	70%
0° - 60°	11,158	91%
0° - 90°	12,223	100%
90° - 180°	0	0%
0° - 180°	12,223	100%

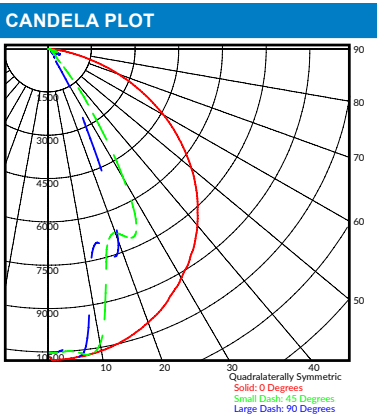


LUMINAIRE DATA	
Part Number	BL2-12L-U-50-FRAL
Description	2ft Blizzard, 13,000 Lumens, Frosted Acrylic Lens
Fixture Lumens (lm)	12,790 lm
Wattage (W)	80 W
Efficacy (lm/W)	159 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.26, 90° = 1.26

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	5,555	44%
0° - 60°	9,641	75%
0° - 90°	12,492	98%
90° - 180°	292	2%
0° - 180°	12,790	100%

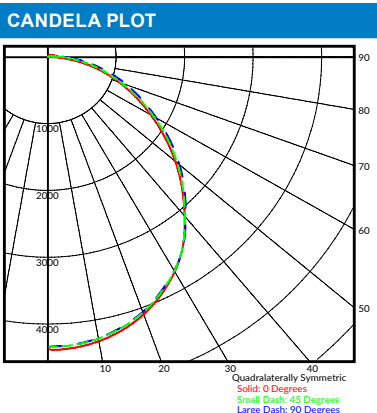

LUMINAIRE DATA	
Part Number	BL2-12L-U-50-FRAL-ND
Description	2ft Blizzard, 13,000 Lumens, Frosted Acrylic Lens, Narrow Distribution
Fixture Lumens (lm)	12,050 lm
Wattage (W)	81 W
Efficacy (lm/W)	149 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.20, 90° = 0.74

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	7,685	64%
0° - 60°	10,466	88%
0° - 90°	11,820	99%
90° - 180°	129	1%
0° - 180°	11,949	100%

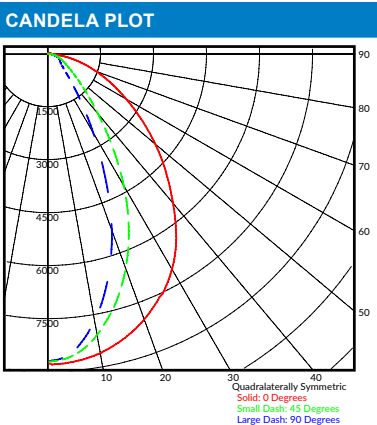


BL

VAPOR TIGHT HIGH BAY

PHOTOMETRIC DATA


LUMINAIRE DATA	
Part Number	BL4-24L-U-50-CAL
Description	4ft Blizzard, 26,000 lumens, clear acrylic lens
Fixture Lumens (lm)	26,140 lm
Wattage (W)	159 W
Efficacy (lm/W)	165 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.30, 90° = 1.29

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	11,449	44%
0° - 60°	20,380	78%
0° - 90°	25,728	98%
90° - 180°	409	2%
0° - 180°	26,138	100%

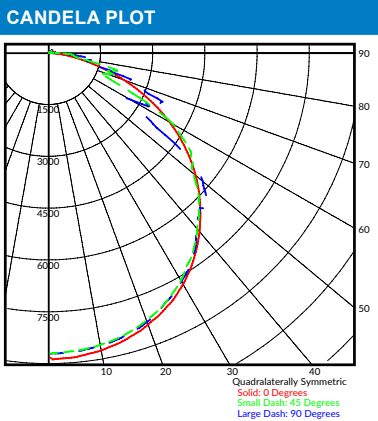


LUMINAIRE DATA	
Part Number	BL4-24L-U-50-CAL-ND
Description	4ft Blizzard, 26,000 lumens, clear acrylic lens with narrow distribution
Fixture Lumens (lm)	25,823 lm
Wattage (W)	159 W
Efficacy (lm/W)	163 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.28, 90° = 0.43

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	17,123	69%
0° - 60°	22,460	91%
0° - 90°	24,693	100%
90° - 180°	106	0%
0° - 180°	25,823	100%

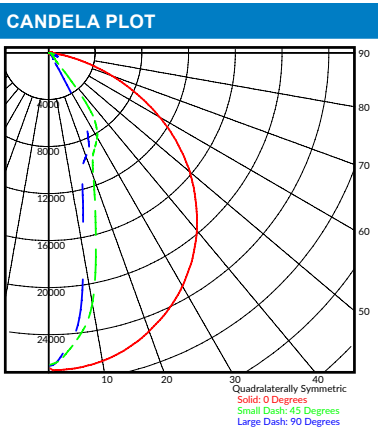

LUMINAIRE DATA	
Part Number	BL4-24L-U-50-FRAL
Description	4ft Blizzard, 25,000 lumens, frosted acrylic lens
Fixture Lumens (lm)	25,370 lm
Wattage (W)	159 W
Efficacy (lm/W)	160 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.26, 90° = 1.24

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	11,050	44%
0° - 60°	19,024	75%
0° - 90°	24,505	97%
90° - 180°	865	3%
0° - 180°	25,370	100%

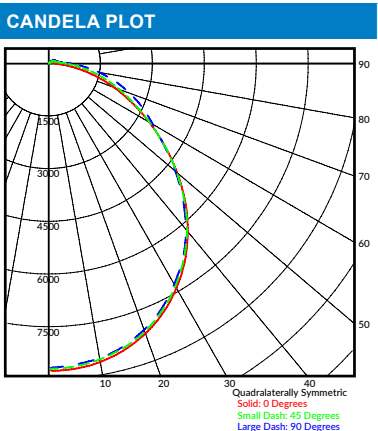

LUMINAIRE DATA	
Part Number	BL4-24L-U-50-FRAL-ND
Description	4ft Blizzard, 24,000 lumens, frosted acrylic lens with narrow distribution
Fixture Lumens (lm)	24,012 lm
Wattage (W)	159 W
Efficacy (lm/W)	151 lm/W
Mounting	Suspended
Spacing Criteria	0° = 1.19, 90° = 0.64

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	15,438	65%
0° - 60°	20,960	88%
0° - 90°	23,485	99%
90° - 180°	269	1%
0° - 180°	24,012	100%

