


Project Name:	Part Number:	Type:
---------------	--------------	-------

FLT


FLAT LENS VOLUMETRIC TROFFER



407-478-3759
www.ilp-inc.com

FEATURES

- Architecturally Designed Flat Lensed Volumetric Troffer
- Steel White Finish Body
- Impact & Scratch Resistant PMMA Frosted Acrylic Lens
- Tamper & Vandal Resistant Design
- Recessed, Surface or Flange Mount
- Advanced Wireless Controls Options
- 1x4, 2x2, 2x4 sizes
- 2,300 – 4,800 Delivered Lumens
- 3000K – 4000K CCT
- >80 Color Rendering Index (CRI)
- Calculated L70 >100,000 hrs
- 0–10V Dimmable Driver (100%–1%)
- 120–277V Universal Voltage
- 5 Year Warranty
- ETL Listed for Damp Locations

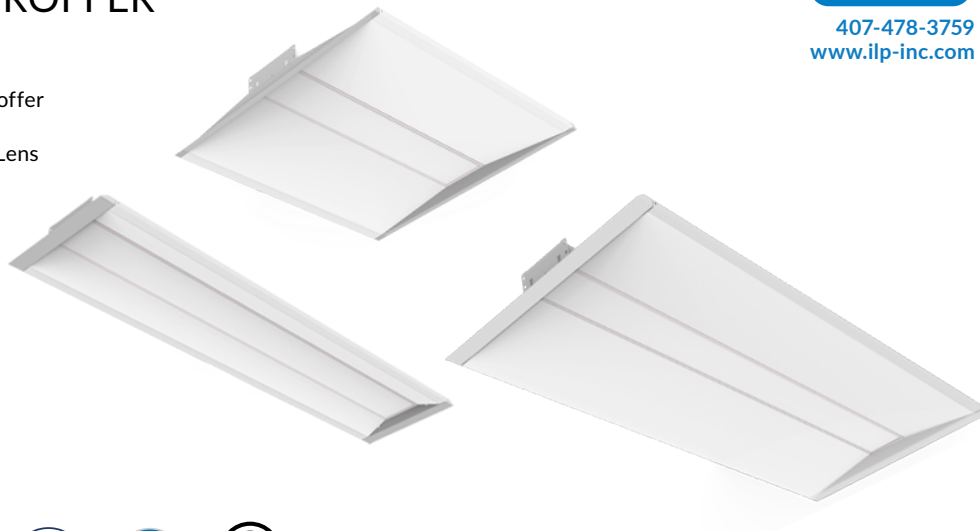

SUITABLE APPLICATIONS

- Education
- Healthcare
- Offices
- Hallways
- Multipurpose Rooms
- Conference Rooms

ORDERING GUIDE:

SERIES	WATTS	DRIVER	CCT
FLT14 1x4 Flat Lens Troffer	19WLED	U 120-277V	40
	30WLED		35
	45WLED		30
FLT22 2x2 Flat Lens Troffer	19WLED		
	30WLED		
	45WLED		
FLT24 2x4 Flat Lens Troffer	26WLED		
	35WLED		
	45WLED		

DRIVER & EMERGENCY OPTIONS		CONTROLS OPTIONS	
Factory Installed		Advanced	
POSTP	Post Painted Aluminum	ESMC ^{2,4}	EasySense Sensor
SR	Sensor Ready Module	VDO ^{3,4}	Lutron Vive DFCSJ-OEM-OCC (Daylight and Occupancy)
DR	DALI Ready Module	VRF ^{3,4}	Lutron Vive DFCSJ-OEM-RF (Radio Frequency Only)
SD347 ¹	347V Step Down Transformer	AWN ^R	Lutron Athena Wireless Node, Radio Frequency Only
EM5	5W LED Factory Installed Battery Backup	AWN ^S	Lutron Athena Wireless Node with Sensor
EM5/HE ⁶	5W LED Factory Installed Battery Backup		
EM7	7W LED Factory Installed Battery Backup		
EM7/HE ⁶	7W LED Factory Installed Battery Backup		
EM10	10W LED Factory Installed Battery Backup		
EM10/HE ⁶	10W LED Factory Installed Battery Backup		
EM12	12W LED Factory Installed Battery Backup		

WHIP OPTIONS—FACTORY INSTALLED		SHIP WITH ACCESSORIES	
MC6/3W	6ft MC Cable w/ 3 leads attached to power–non-dimming	ESMC/WWS/DR	EasySense Dual Rocker Wireless Wall Switch
MC6/4W	6ft 4 Wire MC Cable Whip w/ 3 leads attached to power & 1 lead for battery backup	HC	Hurricane Clips
MC6/5W	6ft 4 Wire MC Cable Whip w/ 3 leads attached to power & 2 lead attached to dimming	FLGK	Flange Kit
MC6/6W	6ft 6 Wire MC Cable Whip w/ 3 leads for fixture power & 2 leads for dimming & 1 battery backup	SM	Surface Mount Kit

¹Does not qualify for DLC

²Must be used with SR Sensor Ready Driver

³One needed per project

⁴Easily Controlled via Mobile Phone with Philips MasterConnect Bluetooth App

⁵View controls page for more details (pg. 3)

⁶CEC Title 20 Compliant

FLT

FLAT LENS VOLUMETRIC TROFFER

LED SYSTEMS INFO ¹	3000K		3500K		4000K		Watts ²	DLC Listing	Replaces
	Part Numbers	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy		
	FLT14-19WLED	2,263 lm	121 lm/w	2,302 lm	123 lm/w	2,341 lm	125 lm/w	19W	Standard
	FLT14-30WLED	3,485 lm	116 lm/w	3,546 lm	118 lm/w	3,609 lm	120 lm/w	30W	Standard
	FLT14-45WLED	4,911 lm	110 lm/w	4,996 lm	112 lm/w	5,027 lm	112 lm/w	45W	Standard
	FLT22-19WLED	2,148 lm	114 lm/w	2,234 lm	119 lm/w	2,319 lm	124 lm/w	19W	Standard
	FLT22-30WLED	3,292 lm	110 lm/w	3,425 lm	114 lm/w	3,557 lm	119 lm/w	30W	Standard
	FLT22-45WLED	4,609 lm	104 lm/w	4,793 lm	108 lm/w	4,802 lm	107 lm/w	45W	Standard
	FLT24-26WLED	3,147 lm	122 lm/w	3,157 lm	123 lm/w	3,168 lm	123 lm/w	26W	Premium
	FLT24-35WLED	4,141 lm	118 lm/w	4,155 lm	119 lm/w	4,171 lm	119 lm/w	35W	Standard
	FLT24-45WLED	5,072lm	114 lm/w	5,089 lm	115 lm/w	4,832 lm	108 lm/w	45W	Standard
¹ Values are nominal, see IES file for more detail ² Electrical data at 25C (77F). Actual wattage may differ by +/-10%.									

SPECIFICATIONS

CONSTRUCTION

Steel white finish body for rigidity, durability, and ease of installation. Optional paint after fabrication. Designed to achieve maximum performance and improved aesthetics. Tamper resistant design with no bottom access to electrical components; requires use of Hurricane Clips (HC) when recess mounting.

ELECTRICAL

Class 2 LED light engine for high efficacy and long life. Calculated L70 >100,000 hrs. LED Lumen Maintenance Estimates based on TM-21 projections for the light source at 25°C ambient. Power Factor > 0.90. Standard 120-277 Vac 0-10V dimmable (1%-100%) with optional 347-480 Vac step down transformer. Optional emergency battery backups available to meet critical life safety lighting requirements.

MOUNTING

Installs into standard 15/16" & narrow 9/16" T-grid ceiling. Optional Flange Kit (FLGK) for recessed drywall mounting & Surface Mount (SM) to ceiling mount options available. Hurricane Clips (HC) required for use in tamper resistant applications. Access plate installed on top of fixture for easy hardwire power connections. Optional factory installed power flex conduit whip (WHIP) available to reduce electrical installation time.

WARRANTY

5 Year Warranty (Terms and Conditions apply)

OPTICS

Impact and Scratch resistant PMMA frosted acrylic lens. Optimized optical design provides soothing illumination and glare reduction for maximum visual comfort.

CONTROLS

Factory installed advanced sensor options available. Sensor mounts within the body of the fixture, see controls page for more detail (pg.3). Inquire with manufacturer for more controls options, including customer supplied items.

CERTIFICATIONS

ETL Listed to US & Canadian safety standards. Suitable for damp locations. Type IC rated. American Recovery & Reinvestment Act Funding Compliant. Title 24 Compliant with sensor options; see local ordinance for qualification information. DLC (DesignLights Consortium) Premium Qualified, with some Standard Qualified configurations. Please refer to the DLC Qualified Products List at www.designlights.org/QPL to confirm specific product qualifications.

FLT


FLAT LENS VOLUMETRIC TROFFER

ADVANCED CONTROLS OPTIONS

EASYSENSE

ESMC

EasySense combines occupancy sensing, daylight harvesting and institutional tuning in one compact solution. This is an ideal control for any Commercial application. Each device allows you to turn on/off occupancy and/or daylight harvesting functions as well as set the full light output, background light level, occupancy prolong time, occupancy grace fading time, and occupancy time out/hold time. It can be easily controlled via the Phillips MasterConnect Bluetooth App on a mobile phone.



ESMC/WWS/DR

Optional Wireless / Batteryless Dual Rocker Wall Switch. Up to 100ft range. Functions include: On/Off, dimming and setting of (2) scenes for full room control.

Specifications:

- Wireless
- ZigBee®
- Batteryless
- 30-100ft Range
- Dual Rocker

Functions:

1. On (Hold to brighten up)
2. Off (Hold to dim down)
3. Scene 1
4. Scene 2



LUTRON

VDO

Vive DFCSJ-OEM-OCC integral fixture control sensor with daylight & occupancy. Vive provides intuitive programming allowing for maximum flexibility with wireless communication & sensing as desired. Provided with factory installed components only. Lutron system provided by others. Sensor must be used in conjunction with Pico Switch/Dimmer. Cannot be used in conjunction with mechanical on/off power switch. Contact factory for more information.



ANWR

Athena wireless node is a radio frequency (RF) device that enables simple, digital control of individual light fixtures in an Athena control system. Enables individual wireless control of each fixture in an Athena control system. Accommodates zone and control changes without rewiring. All drivers on the link are controlled as a single zone. Provided with factory installed components only. Lutron Athena system provided by others.



VRF

Vive DFCSJ-OEM-RF integral fixture control with Radio Frequency (RF) communication. Vive provides intuitive programming allowing for maximum flexibility with wireless communication as desired. Provided with factory installed components only. Lutron system provided by others. Sensor must be used in conjunction with Pico Switch/Dimmer. Cannot be used in conjunction with mechanical on/off power switch. Contact factory for more information.



AWNS

Athena wireless node with a sensor that enables simple, digital control of individual light fixtures in an Athena control system. Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor. Enables individual wireless control of each fixture in an Athena control system. Accommodates zone and control changes without rewiring. All drivers on the link are controlled as a single zone. Provided with factory installed components only. Lutron Athena system provided by others.




FLT


FLAT LENS VOLUMETRIC TROFFER

LINE DRAWINGS


1x4 Dimensions

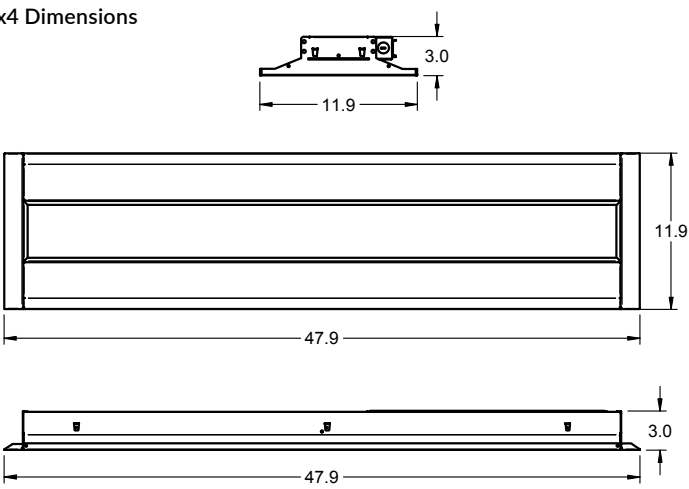


Surface Mount Housing

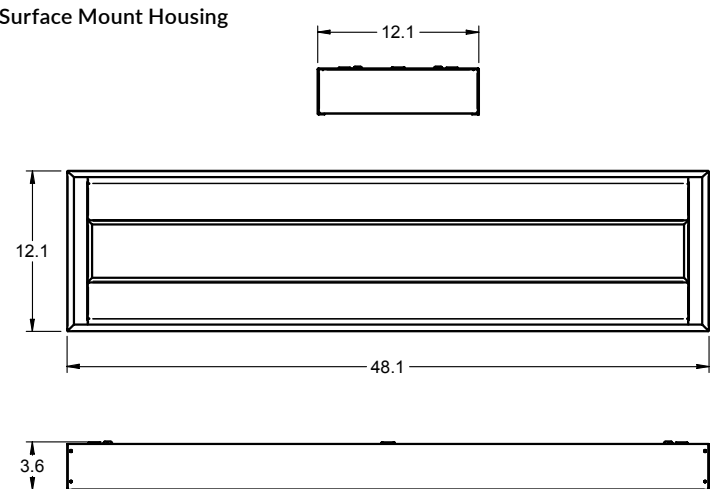


Dimensions with Flange Kit
Ceiling opening is 12.25" x 48.25"

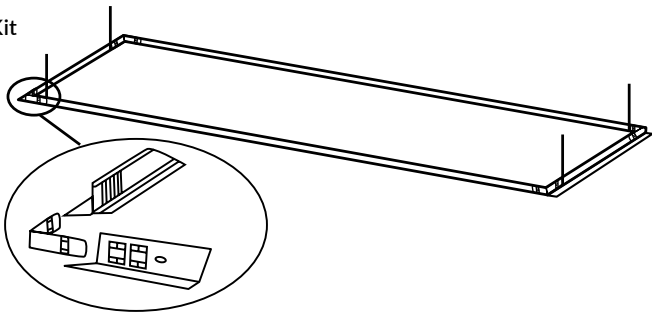


2x2 Dimensions

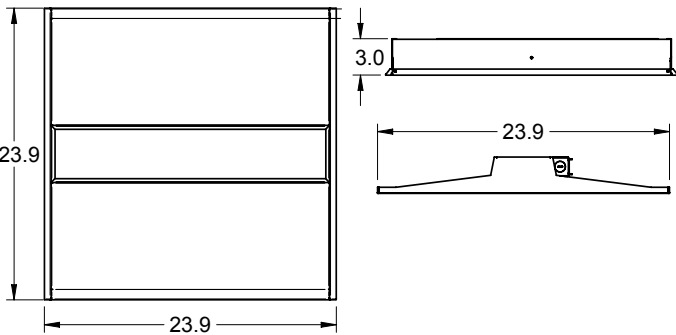

Surface Mount Housing

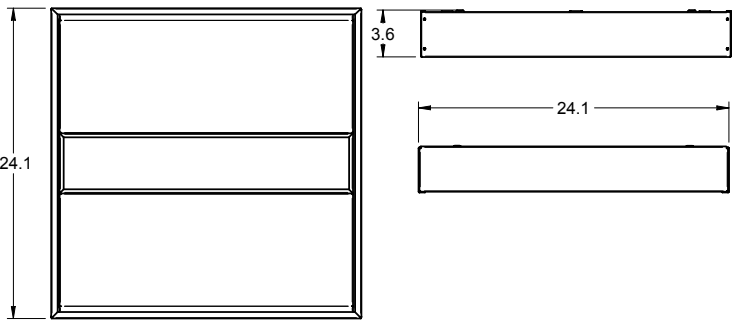

Dimensions with Flange Kit
Ceiling opening is 24.25" x 24.25"

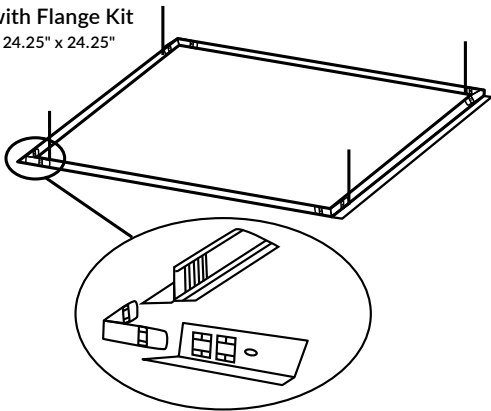


FLT


FLAT LENS VOLUMETRIC TROFFER

LINE DRAWINGS


2x4 Dimensions

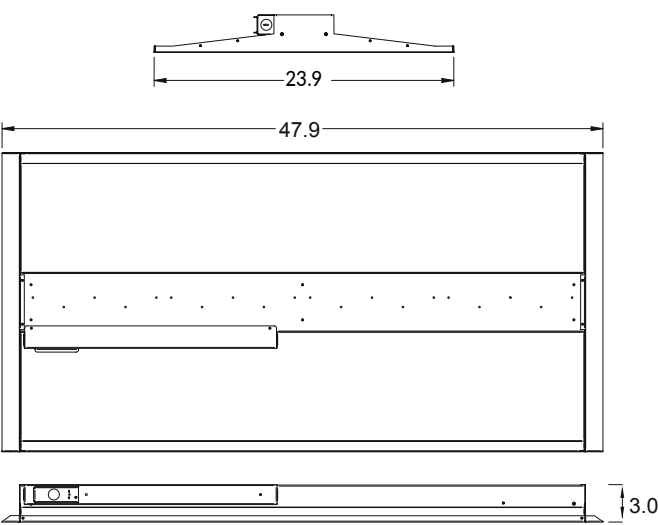

Surface Mount Housing

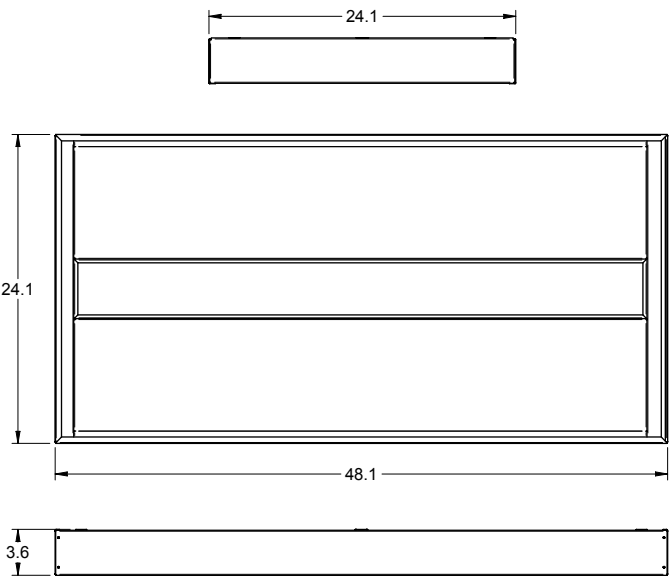

Dimensions with Flange Kit
Ceiling opening is 24.25" x 48.25"

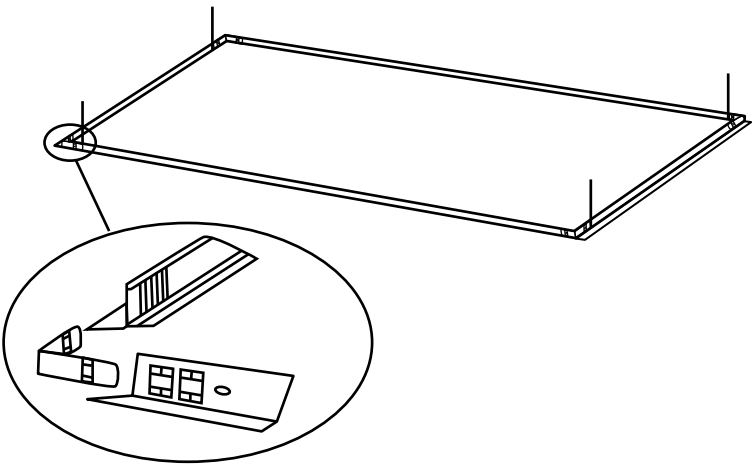


FLT

FLAT LENS VOLUMETRIC TROFFER

PHOTOMETRIC REPORTS


LUMINAIRE DATA	
Part Number	FLT14-30WLED-UNIV-40
Description	1' x 4' Flat Lens Troffer with a flat frosted acrylic lens 3,600 lumens
Fixture Lumens (lm)	3,609 lm
Wattage (W)	30 W
Efficacy (lm/W)	120 lm/W
Mounting	Recessed
Spacing Criteria	0° = 1.21, 90° = 1.19

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	1,661	47%
0° - 60°	2,863	82%
0° - 90°	3,609	100%
90° - 180°	0	0%
0° - 180°	3,609	100%

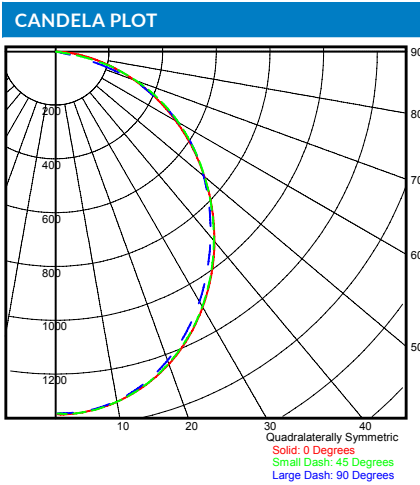

LUMINAIRE DATA	
Part Number	FLT22-30WLED-UNIV-40
Description	2' x 2' Flat Lens Troffer with a flat frosted acrylic lens 3,600 lumens
Fixture Lumens (lm)	3,557 lm
Wattage (W)	30 W
Efficacy (lm/W)	119 lm/W
Mounting	Recessed
Spacing Criteria	0° = 1.21, 90° = 1.19

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	1,633	47%
0° - 60°	2,799	81%
0° - 90°	3,557	100%
90° - 180°	0	0%
0° - 180°	3,557	100%

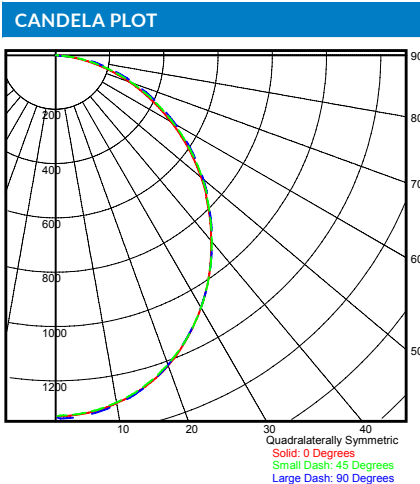

LUMINAIRE DATA	
Part Number	FLT24-35WLED-UNIV-40
Description	2' x 4' Flat Lens Troffer with a flat frosted acrylic lens 4,100 lumens
Fixture Lumens (lm)	4,171 lm
Wattage (W)	35 W
Efficacy (lm/W)	119 lm/W
Mounting	Recessed
Spacing Criteria	0° = 1.21, 90° = 1.19

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	1,844	47%
0° - 60°	3,165	80%
0° - 90°	4,171	100%
90° - 180°	0	0%
0° - 180°	4,171	100%

