

Project Name:	Part Number:	Type:
---------------	--------------	-------

VPAN^{SELECT} SLM




407-478-3759
www.ilp-inc.com

Back-Lit Flat Panel with Skylight Mount Accessory

FEATURES

- Low Glare Smooth Uniform Illumination Back-Lit Panel with field-installed Skylight Mount Kit for regressed look
- Skylight Kit is available in either White Pre-Painted Aluminum or Black Post-Painted Aluminum
- High Transmission PMMA Frosted lens
- 1x4, 2x2 & 2x4 Sizes
- Field Selectable or Factory Set Lumen Output
 - 2,600 to 7,900 Delivered Lumen Range
- Field Selectable or Factory Set CCT
 - 3500K, 4000K & 5000K CCT
- >80 Color Rendering Index (CRI)
- Bi-Level & Line Voltage Dimming Options
- Calculated L70 >100,000hrs
- 0-10V Dimmable Driver (100%-10%)
- 120-277V Universal Voltage
- Type IC Rated for Insulation Contact
- 5 Year Warranty
- DesignLights Consortium Qualified Luminaire
- ETL Listed for Damp Locations

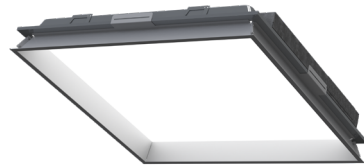

Shown with standard White Trim



Shown with standard Black Trim



SUITABLE APPLICATIONS

- Education
- Healthcare
- Commercial Office
- Storage Facility
- Retail
- Grocery Store
- Residential
- Commercial Kitchen
- Food Prep

ORDERING GUIDE:

SERIES	LUMENS (select one)	DRIVER	CCT	SKYLIGHT MOUNT KIT	TRIM COLOR	ALT. DRIVERS
VPAN14	22L/33L/44L - Selectable	U 120-277V	CCTS - 35/40/50 - CCT Selectable	<input checked="" type="checkbox"/> SLM Skylight Mount Kit	(Blank) White	(Blank) Standard Driver
1x4 Back-Lit Flat Panel	22L		35		BLK ² Black	SR ⁹ Sensor-Ready Driver
	33L		40			DR ⁹ DALI Driver
	44L		50			BLD ⁹ Bi-Level Dimming Driver
VPAN22	22L/33L/44L - Selectable					LVD120 ^{9,10,11} 120V Line Voltage Leading Edge Forward Phase Driver
2x2 Back-Lit Flat Panel	22L					LVD277 ^{9,10,11} 277V Line Voltage Leading Edge Forward Phase Driver
	33L					DIM1 ⁹ 1% Dimming Driver
	44L					
VPAN24	33L/44L/55L - Selectable					
2x4 Back-Lit Flat Panel	33L					
	44L					
	55L					
	50L/65L/80L - Selectable					
	50L					
	65L					
	80L					

OPTIONS		CONTROLS	
Factory Installed		Basic	
EM5	5W LED Factory Installed Battery Backup	MWS ³	User Selectable Bi-Level Dimming Microwave Sensor
EM5/HE ¹	5W LED Factory Installed Battery Backup	Advanced	
EM7	7W LED Factory Installed Battery Backup	ESMC/CM ^{5,6,7,8}	EasySense Grouping Ceiling Mount Sensor
EM7/HE ¹	7W LED Factory Installed Battery Backup	5E/CU/CL ⁸	Enlighted 5E Connected Lighting (CL) Sensor with Control Unit
EM10	10W LED Factory Installed Battery Backup	5E/CU/IOT ⁸	Enlighted 5E Internet of Things (IOT) Sensor with Control Unit
EM10/HE ¹	10W LED Factory Installed Battery Backup	VDO ^{8,9}	Lutron Vive DFCSJ-OEM-OCC Daylight & Occupancy Control
EM10/HE/SD ¹	10W LED Factory Installed Self-Diagnosing Battery Backup	VRF ^{8,9}	Lutron Vive DFCSJ-OEM-RF Radio Frequency Communication Only
EM12	12W LED Factory Installed Battery Backup	AWN ¹²	Lutron Athena Wireless Node
		AWNS ¹²	Lutron Athena Wireless Node with Sensor

* See additional options and footnotes on page 2

Back-Lit Flat Panel with Skylight Mount Accessory

OPTIONS CONT.		FIELD INSTALLABLE ACCESSORIES	
Factory Installed		Ship With Accessories	
SD347²	347V Step Down Transformer	FLGKxx	Flange Mount Kit
MCx/3W	Metal Conduit (x=ft), 3-wire	MW/RC⁴	Programming Tool for MWS Sensor
MCx/4W	Metal Conduit (x=ft), 4-wire	ESMC/WWS/DR	Wireless Wall Dual Rocker Switch To Control Each ES Group Of Fixtures
MCx/5W	Metal Conduit (x=ft), 5-wire		
MCx/6W	Metal Conduit (x=ft), 6-wire		

¹CEC Title 20 Compliant

²Does not qualify for DLC

³Must be used with MW/RC option for commissioning

⁴One needed per project

⁵Must be used with ES/PCD for commissioning

⁶Must be used with SR Sensor Ready Driver

⁷One Sensor can be wired to up to (4) fixtures

with SR Sensor Ready Driver Option

⁸Sensor to be mounted in adjacent ceiling tile

⁹Not compatible with the Lumen selectable and CCT

selectable functions

¹⁰Not Compatible with SD347

¹¹Not Compatible with Sensor options

¹²Sensor Installed into Knockout of Driver Box Housing

LED SYSTEMS INFORMATION ^{1,2}		3500K		4000K		5000K		Watts ³	Replaces
Model Numbers	Fixed Model Numbers	Lumens	Efficacy	Lumens	Efficacy	Lumens	Efficacy		
VPAN14-22L/33L/44L-U-CCTS	VPAN14-22L-U-XX	2,790 lm	135 lm/W	3,074 lm	154 lm/W	2,821 lm	138 lm/W	20W	1T8
	VPAN14-33L-U-XX	3,849 lm	126 lm/W	4,354 lm	149 lm/W	3,929 lm	130 lm/W	30W	2T8
	VPAN14-44L-U-XX	4,742 lm	117 lm/W	5,503 lm	144 lm/W	4,900 lm	122 lm/W	40W	3T8
VPAN22-22L/33L/44L-U-CCTS	VPAN22-22L-U-XX	2,638 lm	130 lm/W	2,904 lm	148 lm/W	2,724 lm	134 lm/W	20W	1T8
	VPAN22-33L-U-XX	3,684 lm	121 lm/W	4,156 lm	142 lm/W	3,834 lm	125 lm/W	30W	2T8
	VPAN22-44L-U-XX	4,569 lm	116 lm/W	5,240 lm	138 lm/W	4,751 lm	120 lm/W	39W	3T8
VPAN24-33L/44L/55L-U-CCTS	VPAN24-33L-U-XX	3,578 lm	126 lm/W	3,992 lm	143 lm/W	3,800 lm	133 lm/W	28W	2T8
	VPAN24-44L-U-XX	4,590 lm	120 lm/W	5,191 lm	140 lm/W	4,885 lm	128 lm/W	38W	3T8
	VPAN24-55L-U-XX	5,577 lm	113 lm/W	6,466 lm	135 lm/W	5,996 lm	122 lm/W	49W	4T8
VPAN24-50L/65L/80L-U-CCTS	VPAN24-50L-U-XX	5,362 lm	141 lm/W	5,527 lm	147 lm/W	5,428 lm	142 lm/W	38W	4T8
	VPAN24-65L-U-XX	6,474 lm	137 lm/W	6,680 lm	144 lm/W	6,528 lm	138 lm/W	47W	5T8
	VPAN24-80L-U-XX	7,603 lm	132 lm/W	7,914 lm	142 lm/W	7,669 lm	134 lm/W	57W	6T8

¹Values are nominal, see IES file for more detail

²SLM BLK reduces stated performance by 10%

³Electrical data at 25C (77F). Actual wattage may differ by +/- 10%

* Ambient Temperature range is -4°F - 104°F for all models

SPECIFICATIONS

CONSTRUCTION

Robust Die-Formed Housing and lens frame with Post-Paint Finish for rigidity and durability. Formed, welded and tightly constructed corners seal to housing to deter entrance of outside particles. Designed to achieve maximum performance and improved aesthetics.

ELECTRICAL

Class 2 LED light engine for high efficacy and long life. Calculated L70 > 100,000hrs. Power Factor > 0.90. Standard 120-277 Vac 0-10V dimmable (10% - 100%). Optional 347V step down transformer. Optional Bi-level dimming driver (50%). Lumen Selectable fixtures allow for ease of field lumen adjustment with switch located on top side of driver. Lumen Selectable fixtures ship at the highest lumen output. CCT Selectable fixtures ship at 4000K.

INSTALLATION

Designed for a variety of mounting solutions including recessed grid, flange and surface mount. Can be installed into standard 15/16" & 9/16" T-grid ceiling. 9/16" installations will reveal portions of post painted fixture frame. Standard integral T-grid clips affixed to housing for secure fixture to grid ceiling. Access plate installed on top of driver housing for ease of hardwire power connections. Mounting clips provided for easy installation of the desired lens. Optional factory installed power flex conduit whip (MC) available to reduce installation time. Lens options install to the outside of the light fixture and fastened with brackets. Please review installation instructions for more information.

OPTICS

High transmission extruded PMMA frosted acrylic lens with excellent shielding for durability and LED glare reduction. Individual micro optics present over each LED chip to provide smooth uniform illumination.

CONTROLS

Factory installed bi-level dimming microwave sensor to provide maximize energy savings when area is unoccupied. Sensor requires use of programming tool to set low end trim fixture output. Sensor installed behind lens. Advanced Control options also available and would be remotely mounted in the neighboring ceiling tile.

CERTIFICATIONS

ETL Listed to US and Canadian safety standards. Suitable for damp locations. Type IC Rated for Insulation Contact. Title 24 Compliant with sensor option; see local ordinance for qualification information. DLC (DesignLights Consortium) Standard Qualified. Please refer to the DLC Qualified Products List at www.Designlights.org/QPL to confirm specific product qualifications.

WARRANTY

5 Year Warranty (Terms and Conditions apply)

Back-Lit Flat Panel with Skylight Mount Accessory

ADVANCED CONTROLS OPTIONS

EASYSENSE

ESMC/CM

EasySense sensor combines occupancy sensing, daylight harvesting and institutional tuning in one compact solution. This is an ideal control for any Commercial application. Each device allows you to turn on/off occupancy and/or daylight harvesting functions as well as set the full light output, background light level, occupancy prolong time, occupancy grace fading time & occupancy time out/hold time. It can be easily controlled via the Philips MasterConnect Bluetooth App on a mobile phone.



ESMC/WWS/DR

Optional Wireless / Batteryless Dual Rocker Wall Switch. Up to 100ft range. Functions include: On/Off, dimming and setting of (2) scenes for full room control.



Specifications:

- Wireless
- ZigBee®
- Batteryless
- 30-100ft Range
- Dual Rocker

Functions:

1. On (Hold to brighten up)
2. Off (Hold to dim down)
3. Scene 1
4. Scene 2

ENLIGHTED

5E/CU/CL

Bundled System with Enlighted 5E sensor (SU-5E-CL), Control Unit (CU-4E-FM) and Cable (CBL-5E-CU4-30N). Fixtures are controlled based on occupancy and ambient light. Includes individual lighting control plus connection to Enlighted Energy Manager. The Energy Manager provides data analysis for all data collected by the Enlighted Smart Sensors for energy, occupancy and environment. Provided with factory installed components only. Enlighted system provided by others. Contact factory for more information. (see image above)

5E/CU/IOT

Bundled System with Enlighted 5E sensor (SU-5E-IOT), Control Unit (CU-4E-FM) and Cable (CBL-5E-CU4-30N). Fixtures are controlled based on occupancy and ambient light. Includes individual lighting control plus connection to Enlighted Energy Manager. Energy Manager provides data analysis for all data collected by Enlighted Smart Sensors for energy, occupancy & environment. Additionally, the IOT functionality takes the data access and function beyond just lighting to a wide range of applications beyond the standard connected lighting controls. Provided with factory installed components only. Enlighted system provided by others. Contact factory for more information. (see image above)

LUTRON

VDO

Vive DFCSJ-OEM-OCC integral fixture control sensor with daylight & occupancy. Vive provides intuitive programming allowing for maximum flexibility with wireless communication & sensing as desired. Provided with factory installed components only. Lutron system provided by others. Sensor must be used in conjunction with Pico Switch/Dimmer. Cannot be used in conjunction with mechanical on/off power switch. Contact factory for more information.



VRF

Vive DFCSJ-OEM-RF integral fixture control with Radio Frequency (RF) communication. Vive provides intuitive programming allowing for maximum flexibility with wireless communication as desired. Provided with factory installed components only. Lutron system provided by others. Sensor must be used in conjunction with Pico Switch/Dimmer. Cannot be used in conjunction with mechanical on/off power switch. Contact factory for more information.



LUTRON

AWNRR

Athena wireless node is a radio frequency (RF) device that enables simple, digital control of individual light fixtures in an Athena control system. Enables individual wireless control of each fixture in an Athena control system. Accommodates zone and control changes without rewiring. All drivers on the link are controlled as a single zone. Provided with factory installed components only. Lutron Athena system provided by others.



AWNS




Athena wireless node with a sensor that enables simple, digital control of individual light fixtures in an Athena control system. Provides wireless control of the fixture and includes a passive infrared (PIR) sensor for occupancy and a daylight sensor. Enables individual wireless control of each fixture in an Athena control system. Accommodates zone and control changes without rewiring. All drivers on the link are controlled as a single zone. Provided with factory installed components only. Lutron Athena system provided by others.



Back-Lit Flat Panel with Skylight Mount Accessory


LINE DRAWINGS

1x4 Dimensions

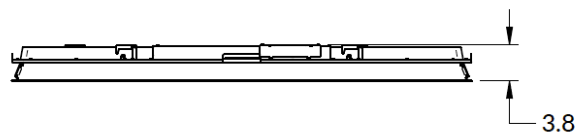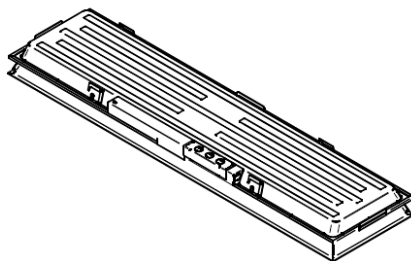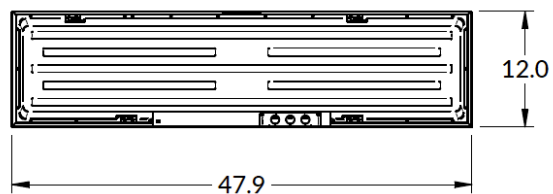


1x4 Flange Kit




Ceiling opening is 12.25" x 48.25"

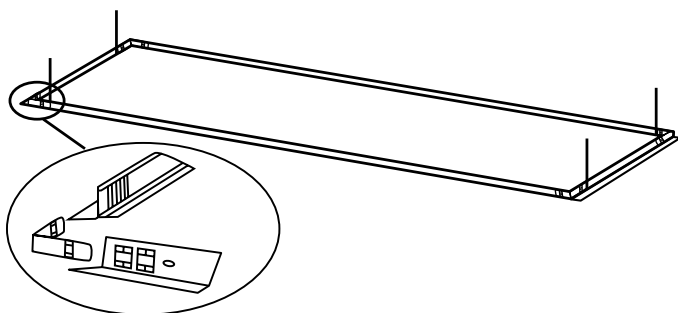

1x4 Dimensions with EM

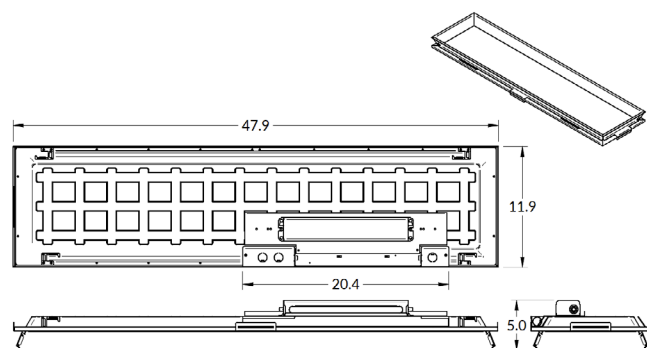


2x2 Dimensions




2x2 Flange Kit

Ceiling opening is 24.25" x 24.25"

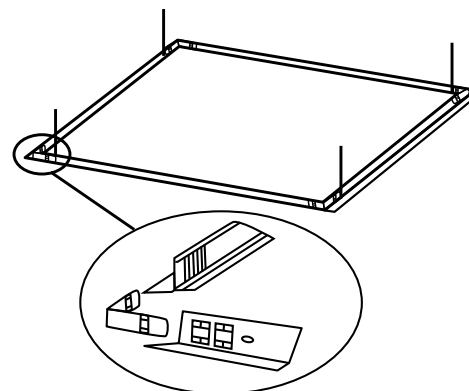


Back-Lit Flat Panel with Skylight Mount Accessory

2x2 Dimensions with EM

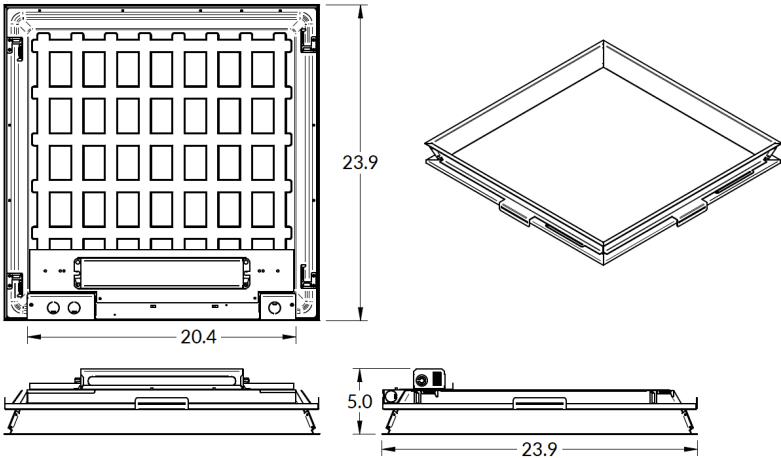


LINE DRAWINGS

2x4 Dimensions

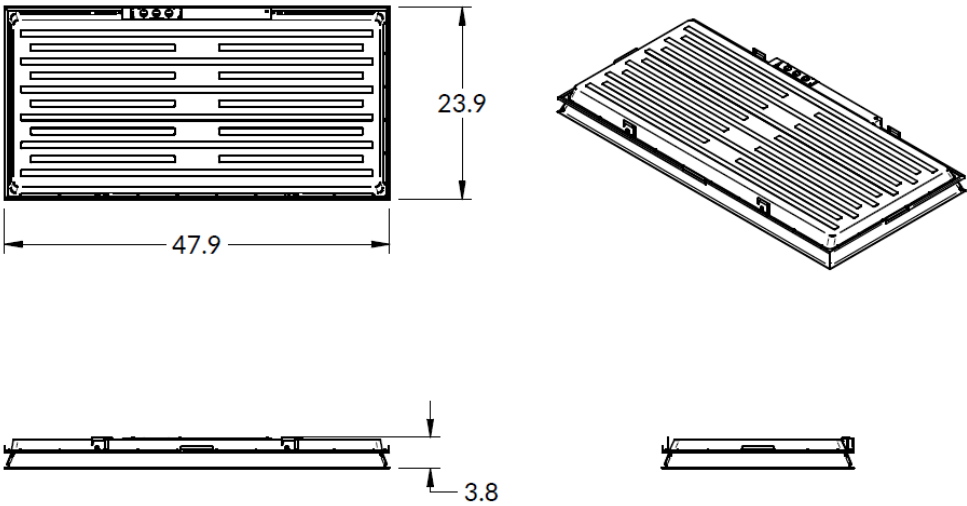


2x4 Flange Kit

Ceiling opening is 24.25" x 48.25"

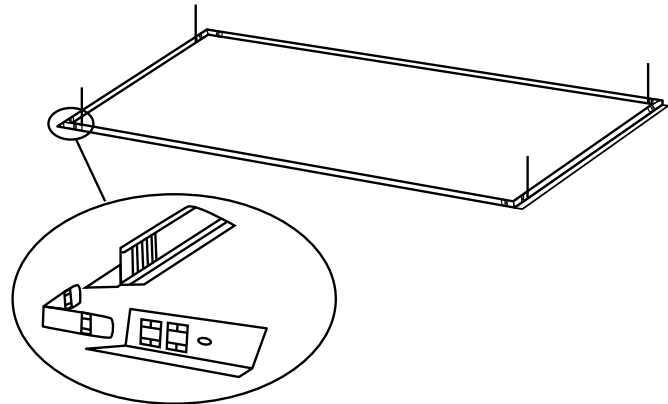

2x4 Dimensions with EM

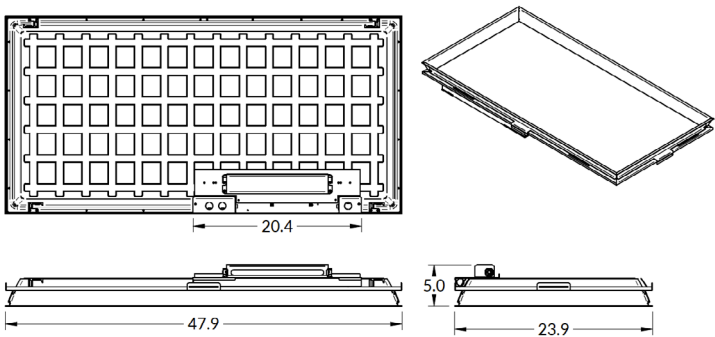


Back-Lit Flat Panel with Skylight Mount Accessory

PHOTOMETRIC DATA


LUMINAIRE DATA	
Part Number	VPAN14-44L-U-40-SLM
Description	Selectable Flat Panel, 1x4, 4400lm, 4000K
Fixture Lumens (lm)	5,503 lm
Wattage (W)	38.4 W
Efficacy (lm/W)	143 lm/W
Mounting	Recessed

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	3,193	58%
0° - 60°	4,850	88%
0° - 90°	5,503	100%
90° - 180°	0	0%
0° - 180°	5,503	100%

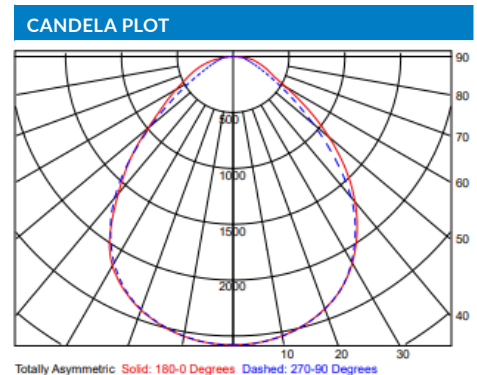


LUMINAIRE DATA	
Part Number	VPAN22-44L-U-40-SLM
Description	Selectable Flat Panel, 2x2, 4400lm, 4000K
Fixture Lumens (lm)	5,240 lm
Wattage (W)	37.9 W
Efficacy (lm/W)	138 lm/W
Mounting	Recessed

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	3,019	58%
0° - 60°	4,630	88%
0° - 90°	5,240	100%
90° - 180°	0	0%
0° - 180°	5,240	100%

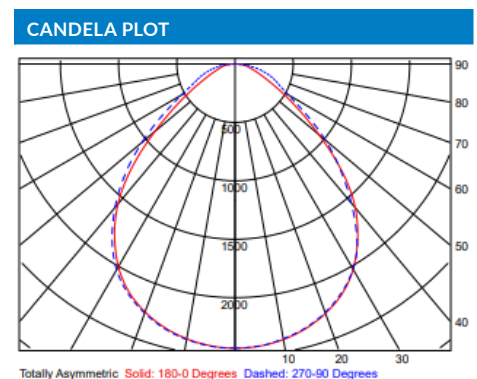

LUMINAIRE DATA	
Part Number	VPAN24-55L-U-40-SLM
Description	Selectable Flat Panel, 2x4, 5500lm, 4000K
Fixture Lumens (lm)	6,465 lm
Wattage (W)	47.8 W
Efficacy (lm/W)	135 lm/W
Mounting	Recessed

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	2,861	44%
0° - 60°	5,091	79%
0° - 90°	6,465	100%
90° - 180°	0	0%
0° - 180°	6,465	100%

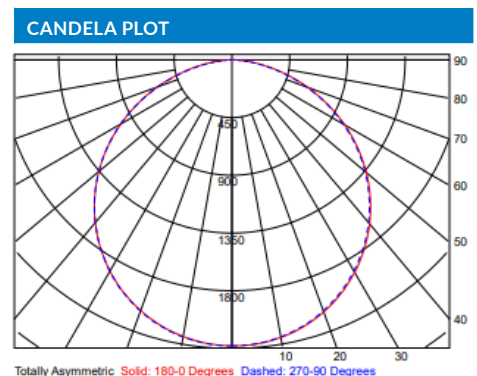

LUMINAIRE DATA	
Part Number	VPAN24-80L-U-40-SLM
Description	Selectable Flat Panel, 2x4, 8000lm, 4000K
Fixture Lumens (lm)	7,914 lm
Wattage (W)	55.9 W
Efficacy (lm/W)	142 lm/W
Mounting	Recessed

ZONAL LUMEN SUMMARY		
Zone	Lumens (lm)	% Fixture
0° - 40°	3,503	44%
0° - 60°	6,230	79%
0° - 90°	7,914	100%
90° - 180°	0	0%
0° - 180°	7,914	100%

