

CONTENT

AUDITORIUM	1
CAFETERIA	3
CLASSROOMS	5
CORRIDORS & STAIRWELLS	7
GYMNASIUMS	9
LIBRARIES	111
LOCKER ROOMS	13
OFFICE & ADMINISTRATION	15
RESTROOMS	17
EXTERIOR LIGHTING	19
CONTROLS	21
EMERGENCY	23



PAR56 LAMP











The REFINE PAR56 lamp is designed with a proprietary GREEN CREATIVE driver which provides flicker free dimming performance with most forward and reverse phase controls. The REFINE optic maximizes the center beam candle power from our 90+ CRI light engine while eliminating glare. The heatsink design allows the lamp to be used in enclosed applications and still maintain a 50,000 hour lifetime. The REFINE PAR56 lamp will replace any GX16d based 300W-500W halogen lamp. Optional PAR64 adapter ring is available for easily converting lamp to fit into PAR64 fixtures.



REFINE VHO PAR38

- Powerful light output of 3,000 lumens
- Flicker Free lighting effect reduces visual fatigue
- Dims to black with most forward and reverse phase controls



SPECFIT

- 4", 6", 8" & 9.5" form factors
- Adjustable lumen output
- TRUE CHROMA version available



GRID FRAME HIGH BAY (GH)

- High performance recessed high bay
- Various lens options for aesthetics
- 2x2' & 2x4' sizes



ROUND HIGH BAY (RB5)

- Customizable illumination with CCT select and a variety of diffuser and reflector options
- IP65-rated, IK10 impact-resistant construction
- Simple installation with versatile mounting options



ENVI DESIGNER PANEL

- Lumen and CCT Selectable
- Various Lens Options
- Acrylic Drop Lens
- Acoustic Drop Panels

- Low profile design
- 1x4', 2x2' & 2x4' sizes



VOLUMETRIC TROFFER (VOLA)

- Architecturally designed volumetric troffer
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



TROFFER KIT (LANCE)

- Architecturally designed volumetric troffer retrofit kit
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking




BACK LIT FLAT PANEL (VPAN SELECT)

- Lumen selectable output
- Three selectable CCTs



ENDEAVOUR HIGH BAY (EDV 2.0)

- Sleek curved polycarbonate end caps for polished look
- Uplight option to enhance full room illumination
- White & black housing options

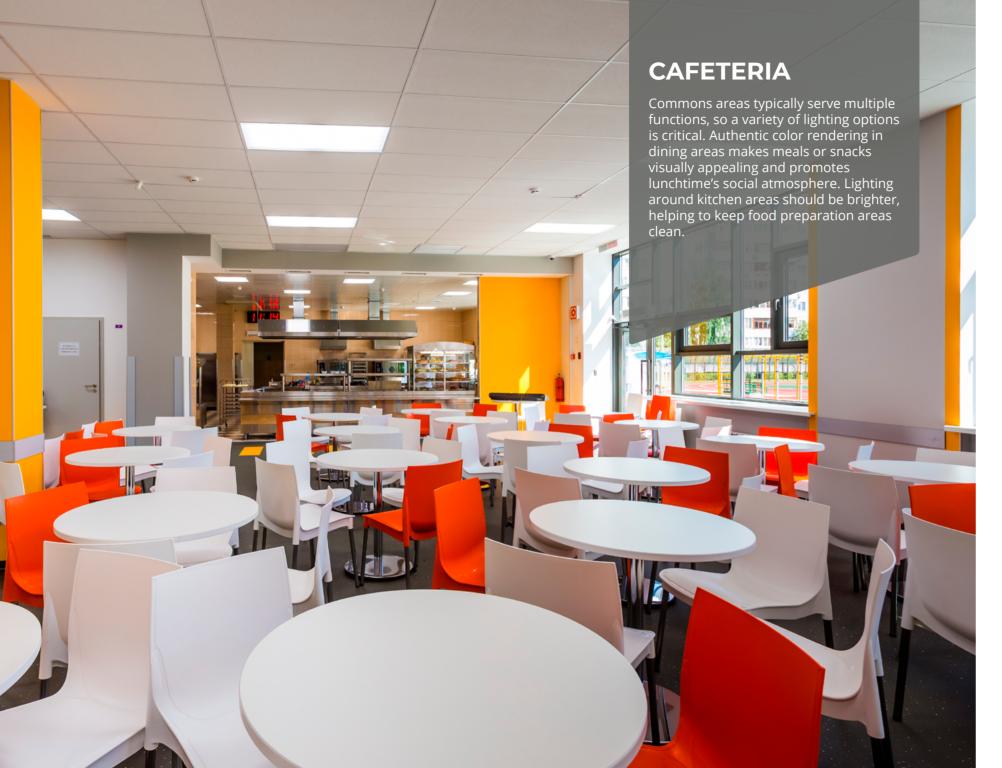

BACK LIT FLAT PANEL (VPAN SELECT)



















VPAN Select takes the ubiquitous Flat Panel luminaire to the next level with full selectability of lumen output and color temperature. It is the perfect solution for many troffer applications and the new selectability offers simplicity and SKU reduction opportunities. Designed with micro-optics that produce smooth and uniform low-glare illumination for optimal visual comfort. Its built-in tool-less field-selectable technology offers three lumen options and three CCT options offering elite versatility when needed most. With a depth under 2", VPAN's robust die-formed housing easily installs in shallow plenums with room to spare.



T8 LAMPS

- NSF listed line voltage lamps with shatter proof coating available
- Options for plug and play ballast install, line voltage wiring, or external driver, are available
- Options for replacing most linear fluorescent lamps



SELECTFIT G2

- 4", 6", 8" & 9.5" form factors
- Field adjustable 3 level lumen outputs and 5 CCTs
- DualDim for both 120V TRIAC/ELV and 0-10V dimming



■ Options for plug and play ballast

driver, are available

install, line voltage wiring, or external

SPECFIT

T5 LAMPS

- 4", 6", 8" & 9.5" form factors
- Adjustable lumen output
- TRUE CHROMA version available



DECO LARGE FILAMENTS

- Meets NSF requirements, plastic ■ Unique and abundant form factors construction will not shatter
 - Installed into a light fixture or simply used alone
 - Optional golden or black E26 pendant light kit



GRID FRAME HIGH BAY (GH)

- High performance recessed high bay
- Various lens options for aesthetics
- 2x2' & 2x4' sizes



ENVI DESIGNER PANEL

- Lumen and CCT Selectable
- Various Lens Options
- Acrylic Drop Lens
- Acoustic Drop Panels



VOLUMETRIC TROFFER (VOLA)

- Architecturally designed volumetric
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



TROFFER KIT (LANCE)

- Architecturally designed volumetric troffer retrofit kit
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



VOLUMETRIC TROFFER (VOLA)







35











VOLA is designed for rigidity, durability and ease of installation while providing maximum performance and improved aesthetics. With an exceptionally robust offering of lumen outputs, sizes and options, VOLA is designed for a multitude of applications.



T8 LAMPS

- Options for plug and play ballast install, line voltage wiring, or external driver, are available
- Options for replacing most linear fluorescent lamps
- Wide light emitting area



SELECTFIT G2

- 4". 6". 8" & 9.5" form factors
- Field adjustable 3 level lumen outputs and 5 CCTs
- DualDim for both 120V TRIAC/ELV and 0-10V dimming



INNOFIT PLUS

- 4". 6". 8" & 9.5" form factors
 - Field adjustable 3 level lumen outputs and 3 CCTs
 - Wet, IC, and Air-tight rated



DISCOVERY NARROW TROFFER

- Sleek, compact and modern troffer
- Slim 4" lens width
- Grid, Flange, Surface & Skylight mounting options
- 1,000 to 12,000 Lumens
- 2', 4', & 8' Sizes



VOLUMETRIC SELECTABLE TROFFER (VST)

- Volumetric design
- Lumen & CCT selectable
- 1x4', 2x2' & 2x4' sizes



TROFFER KIT (LANCE)

- Architecturally designed volumetric troffer retrofit kit
 - High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



ENVI DESIGNER PANEL

- Lumen and CCT Selectable
- Various Lens Options
- Acrylic Drop Lens
- Acoustic Drop Panels



CURVED WRAP (SQ)

- Sleek curved profile wrap fixture
- Suitable for installing in continuous
- 2', 4' & 8' lengths
- Wide Body version available



UTILITY WRAP (SWR)

- Sleek modern design
- Suitable for continuous run applications
- 2ft and 4ft configurations





CAVERN STAIRWELL (CV)













ILP's Cavern Stairwell luminaire provides a safe, robust and attractive design ideal for wall or ceiling mounting. As stairwells are unoccupied 90% throughout the day, fully control light levels for both occupied and unoccupied areas with high/ low user selectable bi-level dimming options for maximum energy savings. Cavern's specification design, performance, housing lengths, finishes, sensor and emergency options make it the proper choice for stairwell illumination.



PL LAMPS

- Replacements for fluorescent lamps from 7W - 42W
- Bases compatible with most fluorescent pin sockets
- Options for plug and play ballast install or wiring to line voltage
- Options for field selectable CCTs



T8 LAMPS

- Options for plug and play ballast install, line voltage wiring, or external driver, are available
- Options for replacing most linear fluorescent lamps
- Wide light emitting area



SELECTFIT G2

- 4". 6". 8" & 9.5" form factors
- Field adjustable 3 level lumen outputs and 5 CCTs
- DualDim for both 120V TRIAC/ELV and 0-10V dimming



VOLUMETRIC TROFFER (VOLA)

- Architecturally designed volumetric
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



VOLUMETRIC SELECTABLE TROFFER (VST)

- Volumetric design
- Lumen & CCT selectable
- 1x4', 2x2' & 2x4' sizes



TROFFER KIT (LANCE)

- Architecturally designed volumetric troffer retrofit kit
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



DISCOVERY LINEAR STRIP (DSC)

- Highly configurable spec grade strip
- No visible fasteners providing a smooth uninterrupted design
- Standard Efficacy (SE) and High Efficacy (HE) lumen packages
- 2', 4' & 8' lengths available



CURVED WRAP (SQ)

- Sleek curved profile wrap fixture
- Suitable for installing in continuous
- 2', 4' & 8' lengths
- Wide Body version available



UTILITY WRAP (SWR)

- Sleek modern design
- Suitable for continuous run applications
- 2ft and 4ft configurations



ENDEAVOUR HIGH BAY (EDV 2.0)





NUROAir









synopse

€ Enlighted

Endeavour 2.0 is the linear high bay of the future. Sturdy - but sleek, it features an aluminum body with curved end caps in white, black or custom finishes to suit even the most unique project aesthetics. Endeavour 2.0 is built to withstand high abuse applications with an IK10 impact rating - the highest impact rating. Endeavour 2.0's uplight option provides enhanced full room illumination, while the high performance narrow and wide distribution optics provide superior horizontal or vertical light levels with excellent uniformity.



EVEREST HIGH BAY (EVT 2.0)

- 12,000 to 60,000 Lumens
- CCT and Lumen Selectable Models
- Patent Pending Field Changeable Lenses
- 16". 30". 36" models



ROUND HIGH BAY (RB5)

- Customizable illumination with CCT reflector options
- IP65-rated, IK10 impact-resistant construction
- Simple installation with versatile mounting options



NYX

- 4". 6" & 8" sizes
- and 0-10V dimming
- For both new construction and direct mount (retrofit)



■ Robust & durable wide body vapor

■ Extremely high efficacy up to 168 lm/W

tight high bay

BLIZZARD HIGH BAY (BL) GRID FRAME HIGH BAY (GH)

- High performance recessed high bay
- Various lens options for aesthetics
- 2ft & 4ft fixture lengths ■ 2x2' & 2x4' sizes



T5 LAMPS POWER AND CCT SELECT HID REPLACEMENT LAMPS

- Meets NSF requirements, plastic construction will not shatter
- Options for plug and play ballast install, line voltage wiring, or external driver, are available

■ Field adjustable 3 level lumen

■ DualDim for both 120V TRIAC/ELV

outputs and 5 CCTs

and 0-10V dimming



PS30 bulb shapes



Innovative locking cover to

after installation

output levels

secure power and CCT settings

■ Field selectable CCT and light

■ Available in classic A21, A23 and

SELECTFIT G2

- 4", 6", 8" & 9.5" form factors ■ 4", 6", 8" & 9.5" form factors
 - Adjustable lumen output

SPECFIT

■ TRUE CHROMA version available



- select and a variety of diffuser and



- Field adjustable lumen and CCTs
- DualDim for both 120V Triac/ELV



DISCOVERY LINEAR STRIP (DSC)



















The Discovery Linear Strip is a highly configurable BAA spec grade strip luminaire. The injection-molded endcap smooth designs have no visible fasteners. The luminaire comes in three sizes (2', 4', 8'), vast lumen range and four different mounting options, catering to your project aesthetics, functionality, and flexibility. Available with a variety of compatible wireless grouping controls in order to cater to your space and maximize energy savings in the way you want.



REFINE PAR LAMPS

- Powered by TRUE CHROMA technology
- High color fidelity, balanced light distribution, and minimal glare
- Wide offering of CCTs, beam angles, and wattages

SLIMFIT SURFACE DOWNLIGHT

■ Deliver lumen output from 820lm

to 1250lm for general lighting

■ Five field selectable CCTs

■ 5". 7" and 9" sizes

applications



T8 LAMPS

- Options for plug and play ballast install, line voltage wiring, or external driver, are available
- Options for replacing most linear fluorescent lamps
- Wide light emitting area



SPECFIT

- 4". 6". 8" & 9.5" form factors ■ Adjustable lumen output
- TRUE CHROMA version available







- Classic, minimalistic, cylindrical form factor
- CRI 90, 2700K, 3000K, 4000K CCTs
- Up to 1050 lumens in 25° or 35° beam angles



PXCYL

- 2", 4", 6", 8" sizes
- Comprehensive mounting options
- Industry leading lumen selectable output up to 5,000lm



VOLUMETRIC TROFFER (VOLA)

- Architecturally designed volumetric
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



TROFFER KIT (LANCE)

- Architecturally designed volumetric troffer retrofit kit
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



ENVI DESIGNER PANEL


- Lumen and CCT Selectable
 - Various Lens Options
 - Acrylic Drop Lens
 - Acoustic Drop Panels



SLIMFIT SURFACE DOWNLIGHT

















Available in 5", 7" and 9" sizes, SLIMFIT surface downlights deliver light output from 820lm to 1250lm for general lighting applications. Featured with SelectKelvin technology, SLIMFIT allows for easy selections of color temperatures in 2700K, 3000K, 3500K, 4000K and 5000K. High CRI 90 and 4-steps SDCM binning ensures superior color accuracy and consistency. The product is engineered for Air-Tight, IC Rated and Wet Location rated applications with easy installation.



T8 LAMPS

- Options for plug and play ballast install, line voltage wiring, or external driver, are available
- Options for replacing most linear fluorescent lamps
- Wide light emitting area



T5 LAMPS

- Meets NSF requirements, plastic construction will not shatter
- Options for plug and play ballast install, line voltage wiring, or external driver, are available



- Only 7/8" below the ceiling
- Up to 1,000lm light output with high CRI 90
- Five field selectable CCTs

SLIMDISK



ENVI DESIGNER PANEL

- Lumen and CCT Selectable
- Various Lens Options
- Acrylic Drop Lens
- Acoustic Drop Panels



■ Flat, Cloud, and Gimbal options

■ DualDim for both 120V Triac/ELV and

BACK LIT FLAT PANEL (VPAN SELECT)

- Lumen selectable output
- Three selectable CCTs
- Low profile design

MULTIFIT

■ 4". 6" and 8" sizes

0-10V dimmina

■ 1x4', 2x2' & 2x4' sizes



NARROW LINEAR VAPOR TIGHT (WTZ)

- Sealed and gasketed vapor tight
- Durable construction for the harshest environments
- 2', 4' & 8' lengths



SLIM STRIP (SS 3.0)

- 1.9" Width
- Lumen and CCT Selectable
- 2,000 to 12,000 Lumens
- 2', 4', & 8' Sizes



VAPOR TIGHT (VVT 2.0)

- Impact-resistant narrow linear vapor tight
- 5VA flame-rated polycarbonate housing, IP65 rated
- Lumen and CCT Selectable
- 3,000 to 12,000 lumens
- 2', 4' & 8' Sizes



TRACK FAMILY SOLUTION















A track lighting family centered around meeting your educational lighting needs. With field-adjustable lumen outputs, multiple mounting options, a variety of beam angles, and an extensive suite of accessories and lenses, you can be sure that your application is getting the focus it deserves. GREEN CREATIVE also offers its own track system for your new construction or remodel applications.






T8 LAMPS

- Options for plug and play ballast install, line voltage wiring, or external driver, are available
- Options for replacing most linear fluorescent lamps
- Wide light emitting area



T5 LAMPS

- Meets NSF requirements, plastic construction will not shatter
- Options for plug and play ballast install, line voltage wiring, or external driver, are available



■ Replacements for fluorescent lamps from

■ Bases compatible with most fluorescent

PL LAMPS

7W - 42W

pin sockets



SELECTFIT G2

- 4", 6", 8" & 9.5" form factors
- Field adjustable 3 level lumen outputs and 5 CCTs
- DualDim for both 120V TRIAC/ELV and 0-10V dimming



SPECFIT

- 4", 6", 8" & 9.5" form factors
- Adjustable lumen output
- TRUE CHROMA version available



PXCYL

- 2", 4", 6", 8" sizes
- Comprehensive mounting options
- Industry leading lumen selectable output up to 5,000lm



DISCOVERY NARROW TROFFER (DNT)

- Sleek, compact and modern troffer
- Slim 4" lens width
- Grid, Flange, Surface & Skylight mounting options
- 1,000 to 12,000 Lumens
- 2', 4', & 8' Sizes



VOLUMETRIC TROFFER (VOLA)

- Architecturally designed volumetric
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



TROFFER KIT (LANCE)

- Architecturally designed volumetric troffer retrofit kit
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking





SlimDisk SURFACE **DOWNLIGHT**













Engineered with a slim profile of just 7/8" thickness below the ceiling, the SlimDisk surface mount light delivers greater value with slimmer design. Offering up to 1,000 lumens of light with a wide 100° beam and a high CRI of 90, this product provides an economical and energy-efficient solution for general lighting needs for new construction or renovation projects in educational applications. SelectKelvin technology enables easy selection of five color temperatures. Its twist-lock diffuser design simplifies and speeds up both installation and light selection in the field.



CCT SELECT A LAMPS

- Suitable to replace 60W, 75W, 100W incandescent lamps
- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls
- Field selectable CCTs



CCT SELECT BR LAMPS

incandescent lamps

■ Suitable to replace up to 85W

- Provides comfortable, diffused light
- Dimmable with forward and reverse phase controls
- Five field selectable CCTs



T8 LAMPS

- Options for plug and play ballast install, line voltage wiring, or external driver, are available
- Options for replacing most linear fluorescent lamps
- Wide light emitting area



SLIMFIT SURFACE DOWNLIGHT

- 5". 7" and 9" sizes
- Deliver lumen output from 820lm to 1250lm for general lighting applications
- Five field selectable CCTs



SLIMDISK

- Only 7/8" below the ceiling
- Up to 1,000lm light output with high CRI 90
- Five field selectable CCTs



VOLUMETRIC TROFFER (VOLA)

- Architecturally designed volumetric
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



TROFFER KIT (LANCE)

- Architecturally designed volumetric troffer retrofit kit
- High efficacy up to 151 lm/W for enhanced energy savings
- Advanced controls options for asset tracking



DISCOVERY LINEAR STRIP (DSC)

- Highly configurable spec grade strip
- No visible fasteners providing a smooth uninterrupted design
- Standard Efficacy (SE) and High Efficacy (HE) lumen packages
- 2', 4' & 8' lengths available



ENVI DESIGNER PANEL

- Lumen and CCT Selectable
 - Various Lens Options
 - Acrylic Drop Lens
 - Acoustic Drop Panels



SKYLINE AREA & FLOOD (SA/SF)











€ Enlighted



The Skyline's sleek aesthetic makes it perfectly-suited for warehouse area & flood applications. Designed for both new construction and retrofit, the Skyline provides a one-for-one solution for replacing legacy metal halide or high pressure sodium luminaires. Priced for payback, it's cost effective die-cast aluminum housings comes in 3-sizes and DLC Premium efficacies, making it the best choice for low acquisition cost and high energy savings. The highly configurable Skyline provides superior illumination, reliability, and ease of installation, exceeding most application requirements.



SKYLINE WALL PACK

- Specification Grade die-cast aluminum housing
- Available in three sizes, delivering 1,000 T3, T4, T5 Rotatable Optical Distributions to 24,000 lumens at up to 150 LPW
- Quick mount bracket enables handsfree wiring and simplifies installation



VIEWPOINT AREA LIGHT (VA)

- Lumen Selectable with 14,000 - 42,000 lumens
- PIR Occupancy, Photocell, & Bi-Level Dimming sensors available



VIEWPOINT FLOOD (VF)

- 5 luminaire scales delivering 2,000-40,000 lumens ■ CCT & lumen selectable

- Adjustable Pole(Rd/Sq), Wall, or Slip-fitter mounting options



SLIM WALL PACK (SWP)

- CCT Selectable (std), Lumen Selectable CCT & lumen selectable with FAO Device
- Battery Backup & PIR Sensor Options
- Adjustable Pole(Rd/Sq) or Wall mounting



VIEWPOINT WALL PACK (VWM)

- Fully adjustable with 5 light levels & 2 sizes Full cutoff type 3 & 4 distributions
 - (up to 14k lumens)
 - Optional sensors and battery backups



■ Knuckle, Trunnion, Slip-Fitter, & Pole

VIEWPOINT CANOPY (VCx)

(up to 14k lumens)

Mount Options

- Available in 2 sizes and 6 lumen outputs from 3.000 - 14.000
- Retrofit solution for traditional HID sources up to 400W
- CCT selectable (30K/40K/50K)



UFO PARKING / CANOPY (UFO)

- Visually comfortable illumination
- 10% uplight reduces cave effect
- Sensor & wireless controls ready



BOLLARDS (BxT)

- 8" flat or dome top bollards
- Value driven, quick ROI
- Multiple beam patterns



POLES & BRACKETS

- Straight round or square steel poles up to 40'
- Multiple bullhorn, wall, and wood pole mounting options
- Adapters for every site scenario



CONTROLS SOLUTIONS









POWERED BY ILLUMUS, BRANDS

- Easy Setup: Intuitive and user-friendly interface ensures a hassle-free setup process.
- Fixture Grouping: Effortlessly group your lighting fixtures for centralized control.
- Customizable Settings: Adjust brightness, color temperature, and more to create the perfect ambiance for any occasion.
- Scheduling: Set custom schedules to automate your lighting and enhance energy efficiency.
- Automation: Use advanced automation features to sync your lighting with daylight harvesting, occupancy sensing, and time scheduling.







- Economical grouping solution
- Occupancy & daylight functions
- Programmable with phone app
- Wireless scalable design
- No gateway required





- 2.4 GHz Wireless Mesh Network
- Occupancy, daylight, zone, scene, & scheduling control with optional energy monitoring
- Secure wireless scalable design
- Gateway for enhanced functionality






- Occupancy & RF solutions
- Occupancy, daylight, & demand response capabilities
- Wireless scalable design
- Vive HUB for enhanced functionality





- Athena wireless node is a radio frequency (RF) device that enables simple, digital control of individual light fixtures in an Athena control system.
- Enables individual wireless control of each fixture in an Athena control system.
- Accommodates zone and control changes without rewiring.
- All drivers on the link are controlled as a single zone.
 Provided with factory installed components only. Lutron Athena system provided by others.

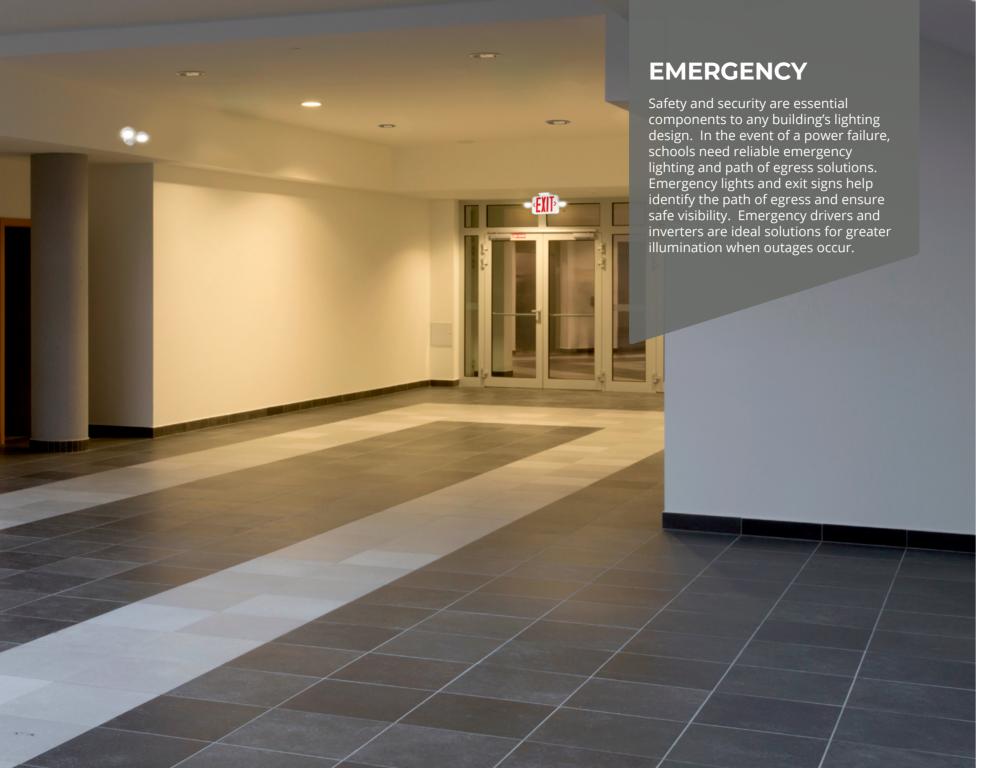

EMERGENCY SOLUTIONS

ILP EXEM







GREEN CREATIVE



GREEN CREATIVE







EMERGENCY LIGHTING SOLUTIONS





- Full line of signs and lights for code compliance
- All products feature thermoplastic housings and LED lighting heads
- Standard and High Output available for varying mounting heights and spacings
- DOE and CEC registered



GREENCREATIVE

- Multiple wattage selections from 5W to 24W
- Specifically designed to work with a wide variety of GREEN CREATIVE's lamps and fixtures
- Meets or exceeds all NEC and life safety code emergency lighting requirements
- CA Title 20 compliant version available
- Additional accessories options for various mounting methods



GREENCREATIVE

- Can be used as either UL 924 listed emergency device or DLC listed UL Type B T8
- Constant power output in emergency mode for a minimum of 90 minutes
- Field selectable three color temperatures
- Continuous self-test design to ensure tube safety
- Emergency Drivers & Inverters (including Self-Diagnostic, High Efficacy, and Title 20 Compliant models)
- Dimming Transfer Devices
- Generator Transfer Switches
- Fire Alarm-Activated Relays & Dry Contact Interfaces
- Solutions compatible across multiple brands and luminaire platforms

EDUCATION APPLICATION BROCHURE





www.greencreative.com

www.ilp-inc.com

An ILLUMUS Brand

www.ILLUMUS.com