



A SIMPLE AND ECONOMICAL LINEAR SOLUTION


FEATURES


- 2ft and 4ft configurations -2ft: Selectable 1800/2400/3000 Lumens -4ft: Selectable 3600/4800/6000 Lumens
- Selectable CCT: 3500K/4000K/5000K
- Sleek modern design with frosted polycarbonate impact resistant lens

- White post-painted durable steel housing
- Surface, Suspended, Junction box and FMB mounting options
- Suitable for continuous run applications
- Integrated microwave sensor option
 - Fully control occupied & unoccupied light levels
- Integrated emergency driver options
- 0-10V Dimmable Driver, dim-to-off
- 120-277V Universal Voltage
- Calculated L70 >75,000 Hours @ 25°C per TM-21-11
- 5 Year Warranty
- ETL Listed for Damp Locations
- DesignLights Consortium® Qualified Luminaire

CCT AND LUMEN SELECTABLE

The easily accessible switches and integrated driver make CCT and Lumen Selectability a breeze.

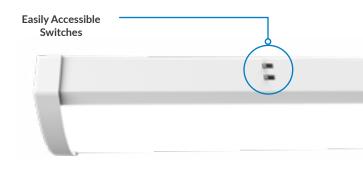



Hallways	Workstations
Warehouses	Storage Facilities
Distribution Centers	Manufacturing Plants




2 HOUSING SIZES

Offered in 2 ft and 4 ft housing lengths, the SWR offers more versatility when it comes to design and overall layout of the project.

2'	 4'
)

INTEGRATED EMERGENCY DRIVER OPTION

Sleek design with the standard 120-277V driver and optional Emergency Driver tucked away inside the fixture housing.

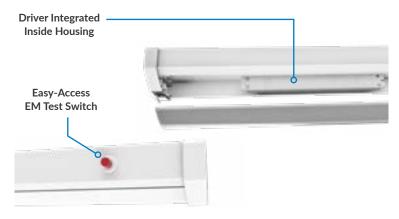


INTEGRAL MWS OPTION


Stay in control with the optional, factory-installed microwave sensor and remote. Hidden within the fixture, this sensor provides optimal occupancy and photocell control.




MOUNTING OPTIONS TO SUIT ANY PROJECT

The SWR isn't your average linear strip when it comes to mounting methods. This fixture offers 4 mounting options including: Surface, Suspension, Junction Box, and Fixture Mounting Box.

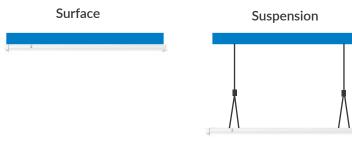



Fixture Mounting Box



Centrally Positioned Holes on Back of Fixture for Easy JBox Mounting

