



**VPAN**

**BACK-LIT  
FLAT PANEL**



# VPAN

## Durable, Dependable, Versatile

VPAN by ILP is a dependable and versatile Back-Lit Panel that provides an affordable option for everyday troffer solutions. Designed with micro-optics that produce smooth and uniform low glare illumination for visual comfort. Its built-in toolless field selectable lumen output technology offers three lumen options providing versatility when needed most. With a depth under 2", VPAN's robust die-formed housing easily installs in shallow plenums with room to spare.



## Suitable Applications

- Education
- Commercial Offices
- Storage Facility
- Residential
- Healthcare
- Retail
- Grocery Store
- Hospitality




## Features

- 1x4, 2x2, 2x4 sizes
- 2,600–7,000 lumen range
- Efficacy up to 127 lm/W
- 3500K & 4000K CCT
- Robust Die-Formed Housing
- Micro Optic Smooth Uniform Illumination
- L70 > 100,000 hrs
- Static & Lumen Selectable Configurations
- Shallow 1.9" Depth for Low Plenum Ceilings
- 0-10V Dimmable Driver (100%–10%)



## Mounting Options

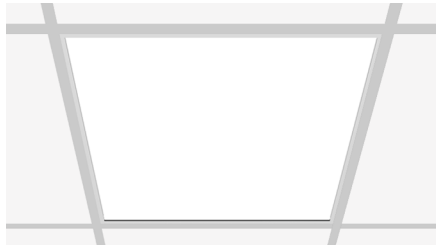

Grid Recessed







Flange Kit Mount



Surface Mount



Suspended

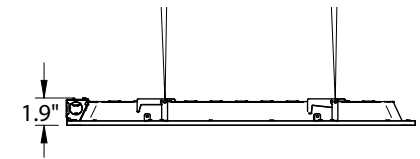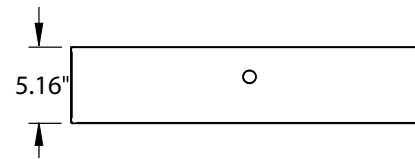

## Factory Installed Options

- Emergency Battery Backups
  - 5W - 12W
  - CEC Title 20 Compliant Options

- MC Cable Whips
  - Dimming and Non-Dimming Options

- Sensor
  - Microwave sensor installed behind lens provides maximize energy savings when area is unoccupied

FIXTURE PERFORMANCE <sup>1</sup>	3500K		4000K		Watts <sup>2</sup>	DLC Listing	Ambient Temp Range	Replaces
	Part Numbers	Lumens	Efficacy	Lumens				
VPAN14-22L-U-XX	2,656 lm	120 lm/W	2,782 lm	126 lm/W	22W	Standard	-4°F - 104°F	1T8
VPAN14-27L-U-XX	3,062 lm	124 lm/W	3,098 lm	125 lm/W	25W			2T8
VPAN14-33L-U-XX	3,430 lm	120 lm/W	3,471 lm	125 lm/W	28W			2T8
VPAN22-27L-U-XX	3,060 lm	124 lm/W	3,133 lm	127 lm/W	25W	Standard	-4°F - 104°F	2T8
VPAN22-33L-U-XX	3,637 lm	123 lm/W	3,724 lm	126 lm/W	30W			2T8
VPAN22-44L-U-XX	4,678 lm	121 lm/W	4,791 lm	123 lm/W	39W			3T8
VPAN24-33L-U-XX	3,508 lm	125 lm/W	3,562 lm	127 lm/W	28W	Standard	-4°F - 104°F	2T8
VPAN24-44L-U-XX	4,568 lm	123 lm/W	4,638 lm	124 lm/W	37W			3T8
VPAN24-55L-U-XX	5,662 lm	119 lm/W	5,749 lm	121 lm/W	48W			4T8
VPAN24-66L-U-XX	6,773 lm	114 lm/W	6,945 lm	117 lm/W	60W			-4°F - 95°F

<sup>1</sup>Values are nominal, see IES file for more detail

<sup>2</sup>Electrical data at 25C (77F). Actual wattage may differ by +/-10%.

# **VPAN** | **BACK-LIT FLAT PANEL**



407-478-3759  
[WWW.ILP-INC.COM](http://WWW.ILP-INC.COM)

An ILLUMUS Brand