



VVT

VAPOR TIGHT

Narrow Linear Vapor Tight

VAPOR TIGHT



The new fully sealed and gasketed, wet-location rated Vapor Tight luminaires are the ideal low entry cost solution to allow customers to quickly hit their financial payback thresholds. It's NSF and IP65 rated toolless access polycarbonate enclosure is easy to service and clean, ideal for variety of applications including food and beverage processing. With a 2' and 4' housing, lumen selectability, high efficacy, and sensor/battery backup options, the Value Vapor Tight is easy to stock, install, and maintain.

Suitable Applications

- Coolers & Freezers
- Outdoor Venue
- Canopies
- Industrial
- Food & Beverage Prep
- Locker Rooms
- Outdoor Walkways
- Garage



Features

2ft & 4ft Lengths

Adjustable Surface, Wall & Suspended Mounting

Polycarbonate Housing Attributes:

- IP65 Rating
- NEMA 4X
- NSF Listed

High Efficacy
Up to 145 lm/W

4000K or 5000K CCTs



3,000 to 6,000 Lumen Range

347-480V Option

Stainless
Steel Latches

Ambient Range: -4°F to 104°F

Frosted Polycarbonate Lens

Additional Features

- >80 CRI
- -40°F Cold Temperature Driver
- 0-10V (10-100%) Dimmable Driver
- 120-277V; Optional 347V & 480V
- 2.5kV Standard; optional 10kV Surge Protector
- Optional Emergency Battery Backups
 - 5W to 12W Output
 - -4°F Cold Temp Operation
 - CEC Title 20 Compliant Options
- Optional Threaded HUBs for Side Power Entry
- Optional Cords
- Optional Wire Cage

Controls Options


Microwave Sensor Option:

- Special photocell to measure and differentiate natural light from LED light from behind the fixture lens
- User defined Tri-level dimming control based upon occupancy (also known as corridor function)
- One-key commissioning via programmable remote control
- One-touch daylight learning via remote control



Mounting Options


Surface

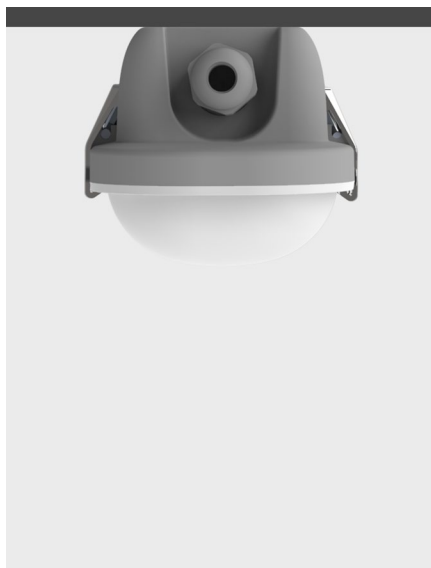

Suspended



45° Angle Wall Mount

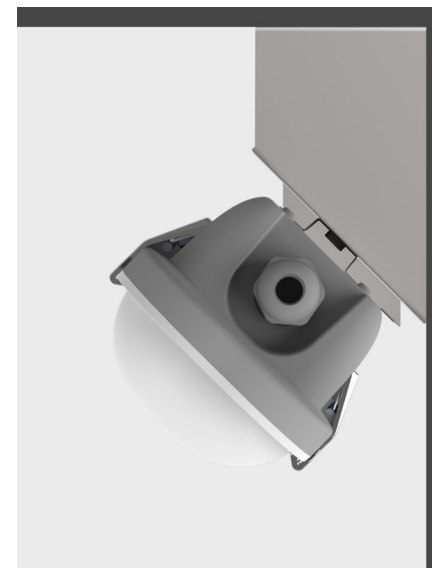

WVT

VAPOR TIGHT
Narrow Linear Vapor Tight



407-478-3759
WWW.ILP-INC.COM

An ILLUMUS Brand