

ENVI FLAT LENS INSTALLATION INSTRUCTIONS

1. Introduction

Tools Needed: Drill w/Philips Head Bit or Philips Head Screwdriver

Warning:

To avoid the risk of fire, explosion, or electric shock, this product shall be installed, inspected, and maintained by a qualified electrician, in accordance with all applicable electrical codes.

Warning:

To avoid electric shock:


- Allow product to cool before servicing.
- Be certain electrical power is OFF before and during installation or maintenance.
- Luminaire must be connected to a wiring system with equipment-grounding conductor.


2. Installation


Flat Lenses

VPAN22 and VPAN24 Fixtures- 2x2 and 2x4

- 1) Locate the provided lens clips and screws. A 2x2 fixture will use 4 of each, while a 2x4 fixture will use 6 of each.
- 2) Lay the lens on the fixture, ensuring that the side without the film is laying flat against the fixture (see label on the lens) and that its centered. Remove the film from the lens prior to installing the lens clips.
- 3) Place the lens clips on the lens (FIG.1), securing with a screw on the backside of the fixture (FIG.2). Make sure that the clips are installed according to FIG.3 for 2x2 and FIG.4 for 2x4, aligning multiple clips on the same side of the fixture.



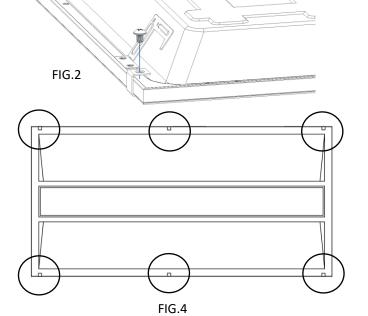



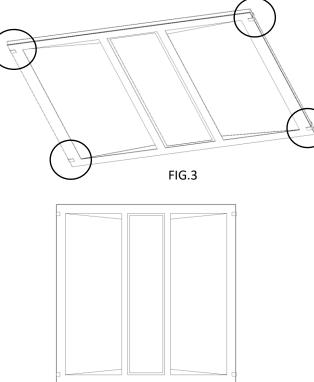


FIG.5

To complete installation, turn power On, check for proper operation of luminaire.