

CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS



Industrial Lighting Products

HIMALAYAN 8 FT

TANDEM HIGH BAY

SPECIFICATIONS

- Precision Formed Enclosure
 - 22 Ga Steel (HS)
 - .040 Aluminum (HA)
- Single Piece Formed Body
- 95% Enhanced Aluminum, Roll Formed Reflectors Standard
- High Gloss Polyester White Paint
- Recessed Door Frame Lens Option
- Riveted Construction
- Side Mount Access Plate
- Vented Ballast Channel
- Extensive Mounting Options
- Multi Level Switching Capable
- Tool-Less Ballast Access
- High Ambient T5HO Ballast Standard
- -20 F Cold Start Ballast



1000W Retrofit Fluorescent High Bay

- Up to 80,000 Lumens
- Single Piece Construction, No Joining Brackets or Field Assembly Required

APPLICATIONS

- Warehouse
- Retail
- Distribution
- Manufacturing Plant
- Aircraft Hangars



ORDERING GUIDE:

HS8

- 4T5

- UH

- LI50

SERIES	LAMP	BALLAST	OPTIONS
<input type="checkbox"/> HS8 - Himalayan Steel <input type="checkbox"/> HA8 - Himalayan Aluminum <input type="checkbox"/> HSN8 - Himalayan Steel Narrow Spacing Aisle Lighter (T5HO Only) <input type="checkbox"/> HAN8 - Himalayan Aluminum Narrow Spacing Aisle Lighter (T5HO Only) <input type="checkbox"/> H38 - Himalayan 3 - 8 Foot (Aluminum)	<input type="checkbox"/> 4T5 - 4 F54* <input type="checkbox"/> 6T5 - 6 F54 <input type="checkbox"/> 8T5 - 8 F54 <input type="checkbox"/> 10T5 - 10 F54 <input type="checkbox"/> 12T5 - 12F54 <input type="checkbox"/> 14T5 - 14 F54** <input type="checkbox"/> 16T5 - 16F54** <input type="checkbox"/> 4T8 - 4 F32* <input type="checkbox"/> 6T8 - 6 F32 <input type="checkbox"/> 8T8 - 8 F32 <input type="checkbox"/> 10T8 - 10 F32 <input type="checkbox"/> 12T8 - 12 F32 <input type="checkbox"/> 14T8 - 14 F32** <input type="checkbox"/> 16T8 - 16 F32**	<input type="checkbox"/> UH - 120-277 T5HO <input type="checkbox"/> UH - 120-277 T8 HBF <input type="checkbox"/> PSH - Program Start T8 HBF <input type="checkbox"/> UR - 120-277 T8 NBF <input type="checkbox"/> PSN - Program Start T8 HBN <input type="checkbox"/> 4H - 347-480V	<input type="checkbox"/> XXXXBYY - Battery Backup, XXXX = Total Lumens Y = # of Lamps <input type="checkbox"/> WC - 11 Ga Wire Cage <input type="checkbox"/> CA - Clear Acrylic Lens .062" (Recessed Door Frame Only) <input type="checkbox"/> PC - Polycarbonate Lens .062 (Recessed Door Frame Only) <input type="checkbox"/> PSM - Prismatic Lens A12 (Recessed Door Frame Only) <input type="checkbox"/> FIOS - Factory Installed Occupancy Sensor <input type="checkbox"/> UP - Up Light (6-16 Lamps Only) <input type="checkbox"/> LIXX - Lamps Installed XX = Lamp Color (ex. LI50 = 5000K) <input type="checkbox"/> CORDX - Cord X= Spec Length <input type="checkbox"/> PLUG - Specified Type <input type="checkbox"/> QDCX - Quick Disconnect Cord, X= Specify Length <input type="checkbox"/> EB - Extra Ballast <input type="checkbox"/> SD480 - 480V Step Down Transformer <input type="checkbox"/> W - 91% White Reflector

* Not Available in H38

** N/A in HSN/HAN



Industrial Lighting Products


CATALOG NUMBER	
PROJECT NAME	TYPE
VOLTAGE	LAMPS

HIMALAYAN 8 FT

TANDEM HIGH BAY

MOUNTING OPTIONS

- V-Clips for dual point chain or cable hanging
- Dual point pendant mount (KOs)
- Cable hanging kits available
- Must be mounted from 4 separate points

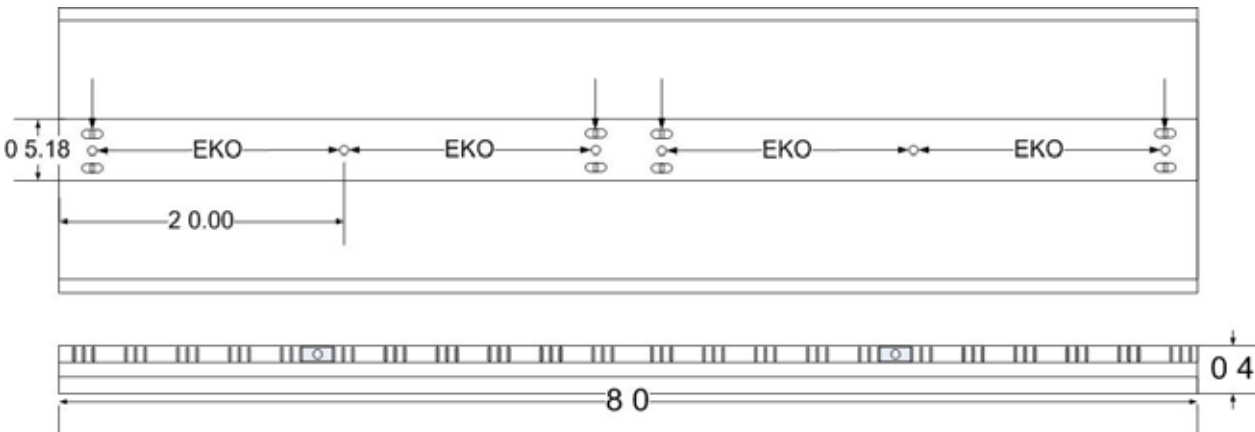

Fixture Widths	4 Lamp	6 Lamp	8 Lamp	10 Lamp	12 Lamp	14 Lamp	16 Lamp
Himalayan 2 Light	6 in.	9 in.	12 in.	15 in.	18 in.	21 in.	24 in.
Himalayan 3	NA	6.25	8.25 in.	10.25 in.	12.25 in.	14.25 in.	16.25 in.
Narrow Aisle Light	8 in.	12 in.	16 in.	20 in.	24 in.	28 in.	32 in.